



Website



Facebook



YouTube

simon
LIGHT UP EMOTIONS

www.simonelectric.com



Simon, S.A.(Spain)
Tel. +34 902 109100
Web. www.simonelectric.com

Simon Electric (China)
Tel. +86 21 3855 5222
Web. www.simon.com.cn

Simon Electric (APAC)
Web. www.simon-apac.com
E-mail. info@simon-apac.com

PT Simon Elektrik Indonesia
Tel. +62 21 52960373
Web. www.simonelektrik.co.id

Dec 2022 Printed

2023-2024 Simon Smart Catalogue

simon

Simon|smart




Practical & Simple
Just as You Imagine

simon

Simon|Smart

We extend the life of a more than 100 years Company by never ceasing innovation.
In Simon we always care and pay attention to the changes of people's habitat and
adapt our products accordingly.

For a more interconnected world we develop a new smart way.
Let's start your Smart life from here...

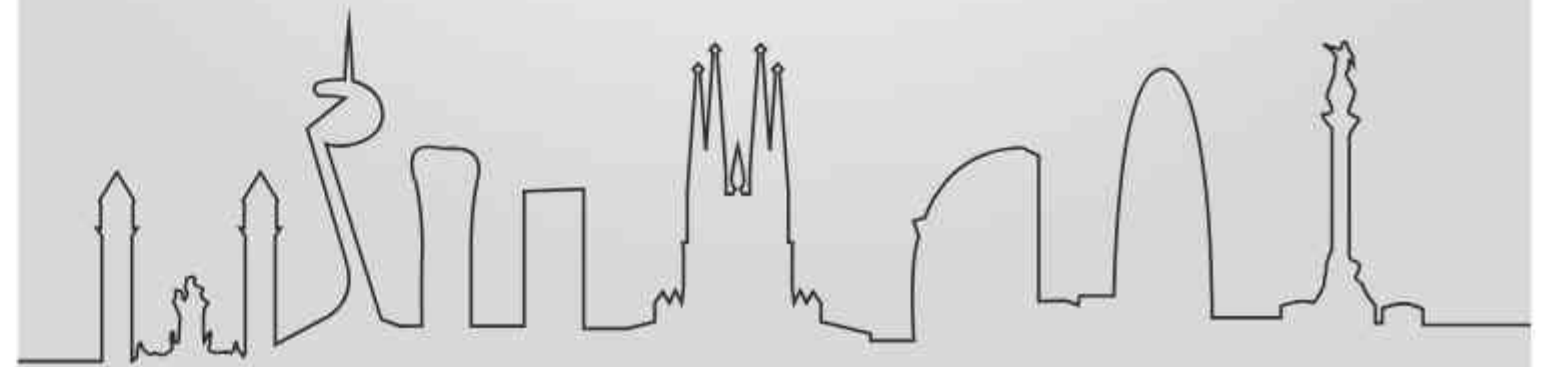

Simon|Smart

In an IoT-based world, switches go from analog to digital adapting to your lifestyle. Simon Smart changes the way we interact with our habitat. Now everything at your fingertips, you can create connected spaces and link smart devices to fill a world of experiences.

Smart Multi-control Panel

Environment

Automation


Curtain Control

Smart Light Control

Smart security

Home Appliance Control

Five ways to interact with the smart universe.

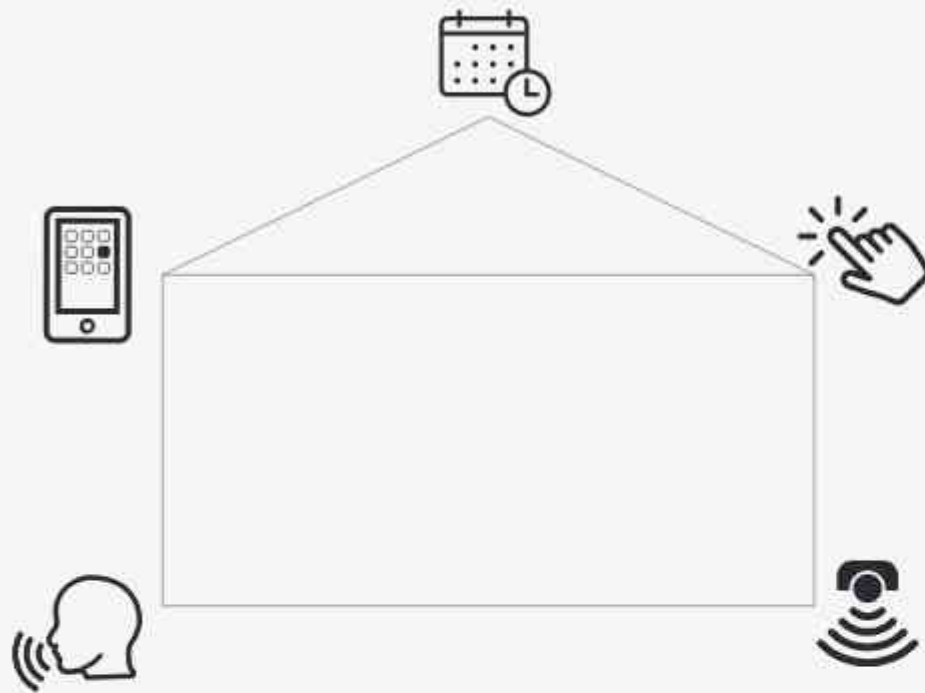

Schedule-App setting customization

Good morning

Let's make your wake up time to be a pleasure,
from Monday to Friday

7:25 Curtains open 25% , the sun light starts to enter slowly.

7:30 the light turns on by 30% to let you wake up softly and your coffee machine turns on to warm up and be ready for you.

Holidays

Every day while you are out from home, set up time for keep some lights on, and open the curtains to let other people think there is someone inside.

This makes your home safer.



Wall control

Bye Bye home

With just one press, you can be sure all the lights are switched off, and all the curtains are closed. Just as you want before leaving your home.

Relax mode

It is time to relax in the sofa, just by a single press, the system will activate the scene with your favourite temperature for AC, with the brightness level of light you need, and the position of the curtains you prefer.



Sensor-Automation

Window control

Let the system helps you to save energy. If the window is opened just turn off the AC.

Temperature comfort

If the temperature exceed the value you want, or the humidity increase too much, the system will activate the AC with your preferred setting.

Motion sensor

If you are walking into the room, the system will open the curtains and turn on the AC.



Voice control-Hands free



Movie time

You are lying on the sofa, just use your voice and your smart speaker to activate the scene you want, or change the parameters of the light, curtains or AC one by one.



App control

All these options can also be managed and configured through the app.



With Simon Smart, your life would become more convenient and comfortable.



Breakfast

While dressing, you hear the coffee machine start to smash the coffee bean. After 5 minutes, a wonderful smell of fresh coffee is caught by your nose. Also, the sliced bread is pop up from the toaster. Time to enjoy your breakfast!



Security alarm

An alert is shown on your phone, saying the window of balcony is open. By switching to the camera, and open real-time monitoring video, you find out that is neighbor's cat came to visit your cat. You are relieved.



Back home

Working in such a hot weather makes people irritable, now you want to back home as soon as possible. The moment you enter the room, you feel cool and comfortable. Because the AC has already started to perform before you arrive home.



Bed time

It is nearly the end of the day, time to go to bed. By laying on the bed, you press the "Sleep Mode" switch near your bed. All the lights are off, AC will adjust the temperature by itself to make you feel comfortable meanwhile saving energy. Sweet dream!






Everything at your fingertips.



reddot award 2020
winner

Relying on the "User First" design concept and simple and friendly interactive experience, our app won the 2020 "Red Dot Design Award"

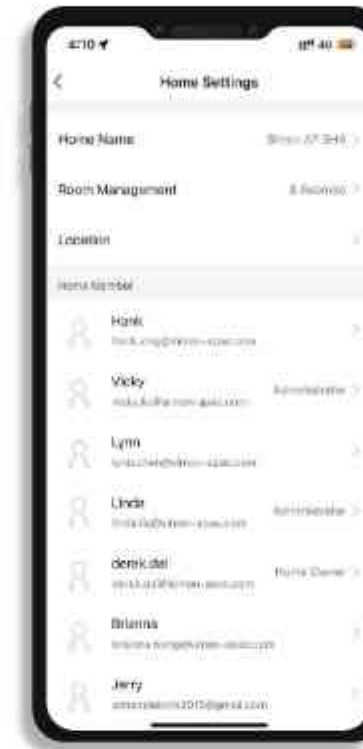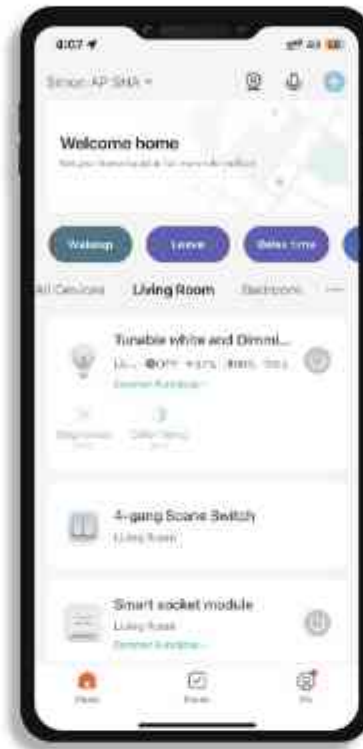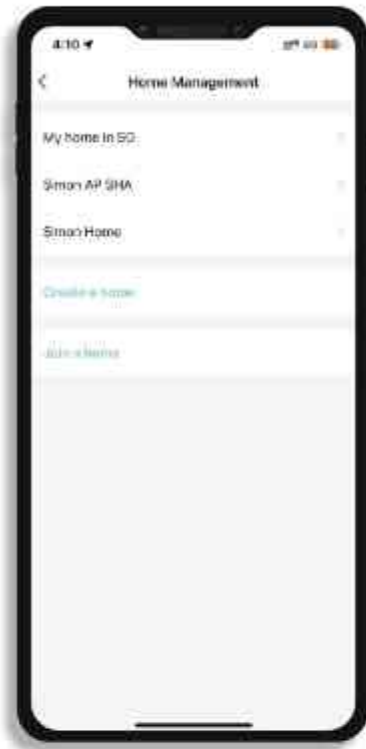

Multiple homes.

Add more than one Smart house to your Simon app and use it to control them, for example, your holiday home or parents' home.



Multiple devices.

You can log in from more than one device, control your home from your personal phone, or your work phone...



Multiple users.

Share your home's control with whoever you want. Every installation can have 1 master and different users.



Notifications.

The App can tell you if any unexpected thing happens, like a device that has low battery, or that a gas sensor was triggered or any other type of information related to user management.

Download Simon Smart app in:



Google Play



App store



Secure

We use the zigbee AES encryption security protocol to protect your data and privacy.



Compatible with voice assistants:

And more functionalities ...



Center of the smart house

Communicate with devices with ZigBee 3.0 protocol



USB A+C gateway
I7/E6/E3/M3



Simon Smart Gateway

Simon smart control panel - for smart switches and smart devices control



Homepad air



Simpad86

Simon smart switch

Support local control, remote control (Simon smart app), voice control, coordinated control



1/2/3/4 gang
smart switch



1/2 gang smart
curtain switch



1/2 gang smart dimming switch
(Triac/0-10V)



Smart tunable white and
color

Simon smart scene switch - for scene control

Only live wire and neutral wire, local scene control still works even internet breakdown



1/2/3/4 gang
Smart scene switch

Smart socket

Convert traditional sockets into smart ones



Smart adapter



Smart breaker

Simon smart easy switch(no neutral)

Support local control, remote control(Simon smart app), voice control, coordinated control



1/2/3 gang
Smart easy switch



6gang wireless remote
scene switch

Smart security - safety detection and monitoring



Smart flammable
gas detector



Smart smoke
alarm detector



Smart flood
detector



Smart emergency
button

Smart home environment control



Smart Central-AC
thermostat module
(VRF)



Smart Central-AC
thermostat module
(FCU)



Smart ventilation
system module



Smart alarm security set

Smart security - safety detection and monitoring



Smart lock



Smart doorbell set



Smart video doorphone set



Smart Camera

Smart curtain



Smart curtain motor

Household appliances coordination



Smart RF infrared remote controller

Smart lighting



Smart Spotlight KC1



Smart downlight



Smart strip

Smart automation - scene coordinate

Support automatically act with other devices



Smart motion sensor



Smart door and window sensor



Smart temperature and humidity Sensor



Smart vibration sensor



Smart human presence detector ceiling sensor



Smart Ceiling light



Smart Strip-SS22/SS52



Smart bulb



Smart GU10

For more technical information,
please search the product datasheet and installation manual.



Website/Download Center

Simon reshaped the space style by "Switches lighting and Smart Control System". We can show you the beauty life through "Art on the wall"," Space by lighting"and "Enjoy your ideas". Happiness is always within your fingertips.



Communication



The Zigbee devices creates a strong mesh network for home automation. That mesh helps us to cover all the home, or any installation with only one gateway. Doesn't matter how far is the last element from the origin due the different elements helps to bounce the information until arrive to the gateway.

The recent addition of Zigbee 3.0 created a unified standard to led all devices to work together.

Everything starts with the gateway



The gateway is the essential element that opens the door to the smart universe. Grouping and connecting all the smart devices of your installation to this new universe.

The gateway is:


- The control center of smart home.
- The bridge between the local installation and the cloud.
- Based on Zigbee3.0 protocol.
- OTA, free upgrade for lifetime.
- The key for a remote control.
- Local service will continue when the artwork down.
- Able to support the interconnection of 3rd party devices.
- Equipped with AES secure encryption to fully protect your privacy.



Smart gateway



Smart gateway

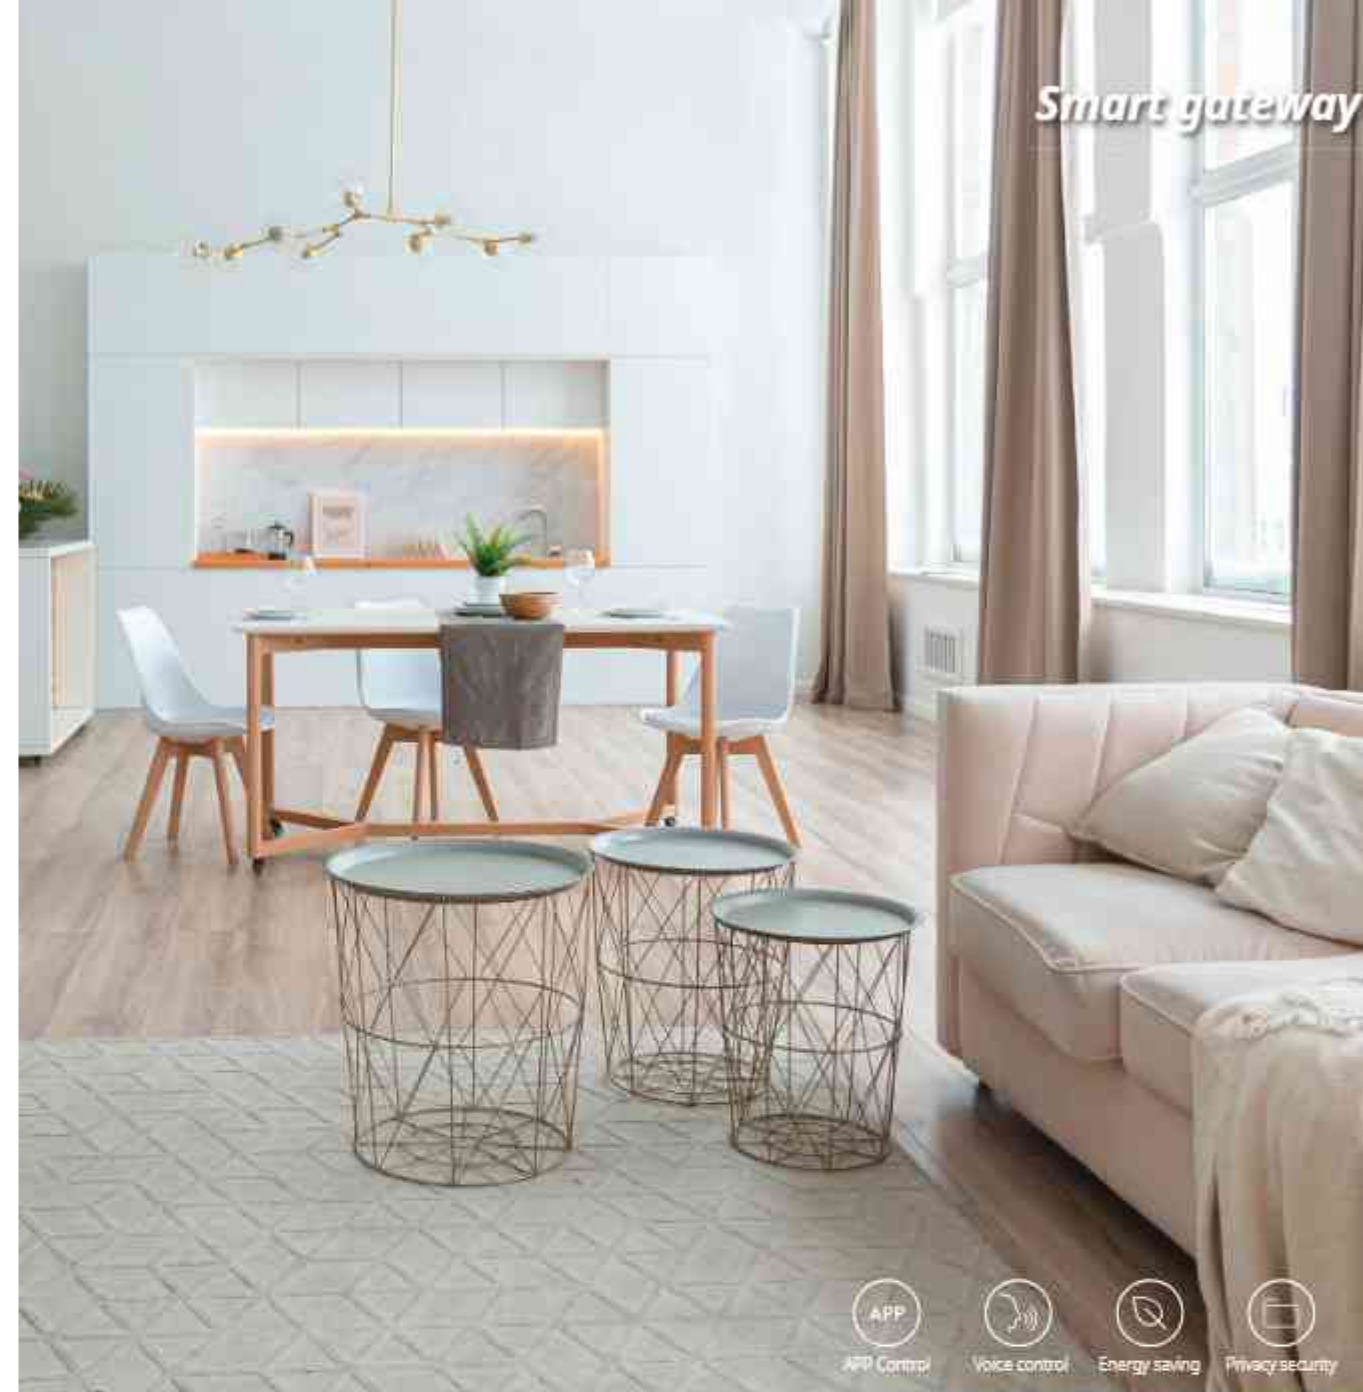

Smart wall-mounted USB A+C gateway (Wi-Fi)

Easy to install
Replace traditional socket in 86 mounting box

No need adaptor for charging
Built-in USB A+C Port

Multiple functions
Support max 20W quick charge + ZigBee3.0 smart gateway

Safety and reliable
Local automation service will continue when the network down

  **zigbee**
Integrate with Simon Smart system
Support 30 ZigBee devices



I7

E6

E3

M3

Product Spec:

Power input: 220-250V~50/60Hz
Communication: Wi-Fi/ZigBee
Recommended ZigBee devices: Max 30 devices
Power supply: Live wire and Neutral wire

Smart gateway(LAN)/Smart gateway(Wi-Fi)

Easy to install
Plug and play

Safety and reliable
Local automation service will continue when the network down

Free upgrade for lifetime
OTA

  **zigbee**
Integrate with Simon Smart system
Support 100 ZigBee devices (LAN)/50 ZigBee devices (Wi-Fi)




(Lan)

(Wi-Fi)

Product Spec:

Power input: USB 5V/1A
Communication: LAN/ZigBee Wi-Fi/ZigBee
Recommended ZigBee devices: Max 100(LAN)
Max 50(Wi-Fi)

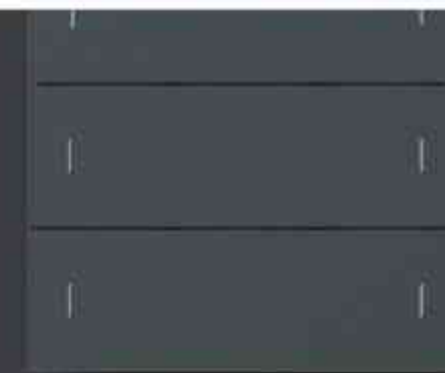

Smart control panel



APP Control



Scene setup



Multi touch control



10-inch Homepad air

Homepad air

Smart control for house, 10-inch multi-control panel

Multi-control smart touch screen panel

One Smart Control Panel could control the smart switches, lights, curtains, air conditioners and all other smart home devices. Configure Smart Home scenes in the APP, turn on the scene mode with one touch on the screen.

Community service

Enable user to subscribe the needed service of community, offer a better communication channel between house owner and property management (customization service, case by case).

Free upgrade for lifetime

CITA



Product Spec:

Power supply: 10-12VDC 1.5A
Max power: 18W
Product size: 253.1*157.9*12.0mm
Touch Screen: 1280*800
Network interface: Wi-Fi, ETH
Working temperature: -10°C~45°C
Working humidity: <90%RH



Smart control panel



APP Control



Scene setup



Multi touch control



Built-in gateway



4-inch Simpad86 multi-control panel with gateway

Simpad86

Smart control for home, 4-inch Simpad86 multi-control panel with gateway

Multi-control smart touch screen panel

One Smart Control Panel could control the smart switches, lights, curtains, air conditioners and all other smart home devices. Configure Smart Home scenes in the APP, turn on the scene mode with one touch on the screen.

ZigBee gateway function

Up to 100+ ZigBee sub-devices

Easy to install

Compatible with European standard wall boxes



Product Spec:

Power supply: 100-240VAC, 50/60Hz
Communication: Wi-Fi, Bluetooth, ZigBee
Product size: 86x86x35.75mm (with the base)
86x86x10.5mm (without the base)
Working temperature: 0°C-40°C
Working humidity: 5%-90%RH
Power supply: Live wire and Neutral wire
No load wires between panel and lights

Option: with built-in Alexa voice service



Smart switch



APP Control



Voice control



Automation



Plan and schedule



Wall switch



i7



E3



M3

Smart switch

Multiple control ways, remote control ON/OFF devices,
no more just traditional switch

- i7/E3/M3 smart series, fitting all kinds of interior design styles

Simon products are offered in numerous design series which can be perfectly suitable for all kinds of interior design styles,
compatible with Simon mechanical switches and sockets.

- Multiple control ways

Support wall control, APP control, voice control, timing, scenes and automation with other smart devices.

- Compatible with smart lights and non-smart lights

Strong load capacity, no fear of instantaneous large current.

- Safe and reliable hardware

ZigBee 3.0 customized antenna+V-B relay

Product Spec:

Normal voltage: 250V-50/60Hz

Operational voltage: 176V/AC-264V/AC

Load: 200W/gang


Power consumption: 1W

Communication: ZigBee

Power supply: Live wire and Neutral wire

Simon i7 Smart switch

Elegant Simple Unique Sophisticated

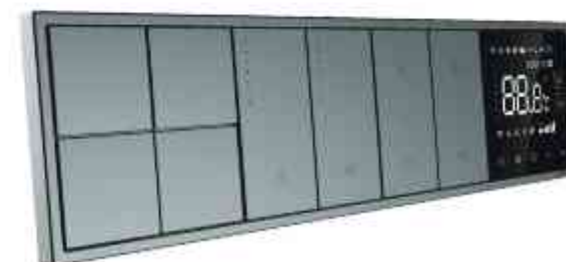

Smart switch



Smart switch



Simon E3 Smart switch

Essential design,
maximum functionality



Simon M3 Smart switch

Boundless & Fearless



Smart scene switch



APP Control



Voice control



Scene setup



2-way control



Wall switch



I7

E3



M3

Smart scene switch

Achieve scenario and 2-way control setting

I7/E3/M3 smart series, fitting all kinds of interior design styles

Simon products are offered in numerous design series which can be perfectly suitable for all kinds of interior design styles, compatible with Simon mechanical switches and sockets.

Multiple control ways

Support wall control, APP control, voice control, timing and automation with other smart devices

Easy to set scenes and 2-way control by APP

Gateway + smart scene switch (replace conventional 2-way switch) + smart switch-2-way switch

Product Spec:

Normal voltage: 250V~50/60Hz

Operational voltage: 176VAC~264VAC

Power consumption: <1W

Communication: ZigBee

Power supply: Live wire and Neutral wire
(no load wires between switch and light)



Smart switch



1 gang smart switch(20A)

Smart switch (20A)

Upgrade air-conditioner into smart version

Remote pre-set temperature before getting home

Multiple control modes

Support wall control, APP control, voice control, timing, scenes and automation with other smart devices

Schedule setting on/off

Balance the comfortable and energy-saving life

Easy replace the original conventional 20A switches

Upgrade air-conditioner into smart version

Product Spec:

Normal voltage: 250V~50/60Hz
Operational voltage: 176VAC~264VAC
Load: Max 20A Resistance Load
Communication: ZigBee



APP Control



Voice control



Automation



Plan and schedule



Wall switch

zigbee



17

Smart easy switch (no neutral)



Smart easy switch(no neutral)

Multiple control ways, easy replace conventional switch

i7/E6/E3/M3/S2S smart series, fitting all kinds of interior design styles

Simon products are offered in numerous design series which can be perfectly suitable for all kinds of interior design styles, compatible with Simon mechanical switches and sockets.

Safe and reliable hardware


ZigBee 3.0/ customized antenna | TV-F relay

Multiple control ways

Support wall control, APP control, voice control, timing scenes and automation with other smart devices

Easy to retrofit

No extra wiring, retrofit in original 86 mounting box, same wiring method with traditional switch

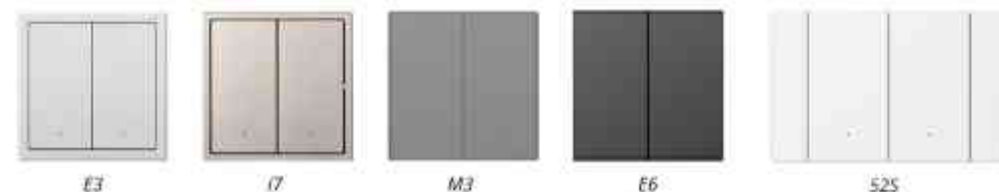

Product Spec:

Normal voltage: 250V~50/60Hz
Operational voltage: 175VAC~254VAC
Load: >3W, 200W(LED)Gang
Communication: ZigBee

Smart easy switch (no neutral)



Wireless remote scene switch

Achieve scenario and 2-way control setting

2-way control

With smart easy switching (neutral) can achieve 2-way control

Scene switch

2/6 custom buttons support user-defined scenarios set by APP (Welcome/Leave etc)

No space limitation

Wiring-free, 3M glue, stick-free



Product Spec:

Power supply: CR2032
(no load wires between switch and light)

Smart curtain switch



I7

E3



M3

Smart curtain switch

Control the curtain any time in any room

I7/E3/M3 smart series, fitting all kinds of interior design styles

Simon products are offered in numerous design series which can be perfectly suitable for all kinds of interior design styles, compatible with Simon mechanical switches and sockets.

Multiple control modes

Support wall control, APP control, voice control, timing, scenes and automation with other smart devices.

Connect 4/5 wire high voltage curtain motor.

Product Spec:


Normal voltage: 250V-50/60Hz
Operational voltage: 176VAC-264VAC
Load: 200W/gang
Communication: ZigBee



Smart dimming switch



Smart dimming switch

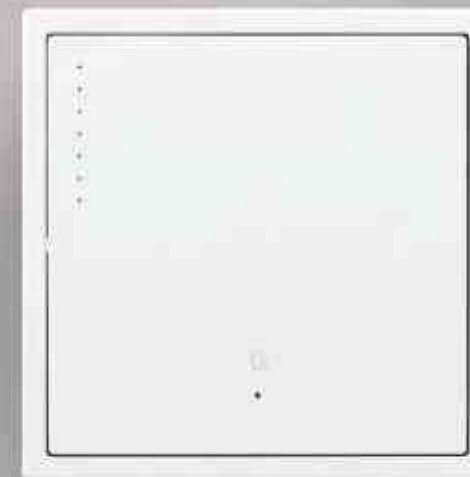

Smart Triac dimming switch (load: Triac driver)

Dimming the brightness of light freely, compatible with Simon Triac light


- i7/E3/M3 smart series, fitting all kinds of interior design styles
Simon products are offered in numerous design series which can be perfectly suitable for all kinds of interior design styles, compatible with Simon mechanical switches and sockets.

Multiple control ways

Support wall control, APP control, voice control, timing, scenes and automation with other smart devices.

LED indicator display

Free to set indicators, set indicator mode according to using habit, such as close indicator when sleeping.

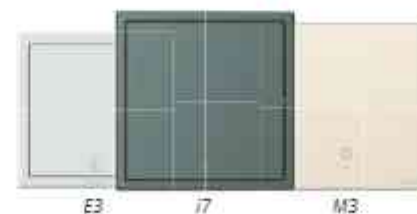

Product Spec:

Normal voltage: 250V-50/60Hz
Operational voltage: 176VAC-264VAC
Load: 200W/gang (Triac)
Communication: ZigBee
Power supply: Live wire and Neutral wire

Smart dimming switch (No load/ ZigBee to 0-10V set)

Touch for on/off and slide for dimming, compatible with any 0-10V light

Multiple control ways

Support wall control, APP control, voice control, timing, scenes and automation with other smart devices.

Wireless Control the Simon smart module, compatible with any 0-10V light

Need use with Simon wireless converter (ZigBee to 0-10V) and ZigBee module. ZigBee module can be controlled by APP or dimming switch.

Sliding smoothly with LED indicator display

LED indicator display the brightness when sliding.
Turn the light on to the right brightness for different activities and times of the day.



Product Spec:

Normal voltage: 250V-50/60Hz
Operational voltage: 176VAC-264VAC
Communication: ZigBee
Power supply: Live wire and Neutral wire
No load wires between switch and light

Smart tunable white and dimming switch



M3

I7

Smart tunable white and dimming switch (No load/ ZigBee control)

Touch on/off, adjust the brightness, adjust CCT, compatible with Simon smart light (ZigBee) like KC1

I7/M3 smart series, fitting all kinds of interior design styles

Simon products are offered in numerous design series which can be perfectly suitable for all kinds of interior design styles, compatible with Simon mechanical switches and sockets.

Adjust cold & warm color temperature

Rotate to adjust color temperature

Adjust the brightness of space

Rotate to turn up and dim down

Multiple control ways

Support wall control, APP control, voice control, timing, scenes and automation with other smart devices.

Wireless Control the Simon smart module, Compatible with Simon Smart light (ZigBee) like KC1

Direct use with Simon smart driver and ZigBee module
ZigBee module can be controlled by APP or dimming switch



Product Spec:

Normal voltage: 250V-50/60Hz
Operational voltage: 176VAC-264VAC
Communication: ZigBee
Power supply: Live wire and Neutral wire
No load wires between switch and light

Smart Home Environment Control



Smart ventilation system module

Modern minimalist style, create healthy environment

Simplify design, 180° visual display

Support view the parameter from back angle

Multiple control ways

Support wall control, APP control, voice control, timing, scenes and automation with other smart devices

Screen backlight adjustment

0 for lights off, 1-5 for dimming separately manually

Memory function

Recover to the last time status when power on, no need reset

Reminder for filter replacement

Setting replacement cycle, reminder in time



Smart Home Environment Control

Smart Home Environment Control



Smart Central-AC Thermostat Module (VRF)



- Simplify design, 180° visual display

Support view the parameter from more angle

- Multiple control ways

Support wall control, APP control, voice control, timing, scenes and automation with other smart devices

- Screen backlight adjustment

0 for lights off, 1-5 for dimming separately manually

- Memory function

Recover to the last time status when power on, no need reset

- Four modes: Cool, heat, ventilation, dehumidify



Product Spec:

Normal voltage: 12V
Rated current: 50mA
Communication interface: RS485
Temperature display range: -10~40°C
Temperature setting range: 19~30°C

*VRF, need customized AC gateway module

Smart Central-AC Thermostat Module (FCU)



- Simplify design, 180° visual display

Support view the parameter from more angle

- Multiple control ways

Support wall control, APP control, voice control, timing, scenes and automation with other smart devices

- Screen backlight adjustment

0 for lights off, 1-5 for dimming separately manually

- Memory function

Recover to the last time status when power on, no need reset

- Four modes: Cool, heat, ventilation, dehumidify




Product Spec:

Normal voltage: 250V~50/60Hz
Rated current: 2A
Temperature sensor accuracy: ±1°C
Temperature display range: 0~40°C
Temperature setting range: 16~35°C

Simon*i*7

ELEGANT SIMPLE UNIQUE SOPHISTICATED

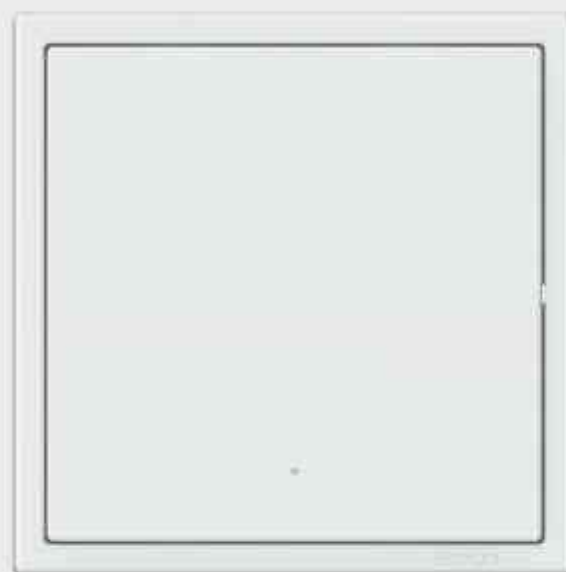

White



Champagne



Grey



Black

COLOUR ▶

White

-46
Champagne

-61
Grey

-26
Black

 **zigbee**

Dimensions of Applicable Box

Plate: 60*60mm
Box: 72*72mm
Filing Center: 60.8mm

The codes are not included frames.

Smart Gateway

S00E0-S008

Smart Zigbee Gateway (LAN)



S00E0-S009

Smart Zigbee Gateway (WiFi)



70E761TY

Smart ZigBee Wall-mounted
USB A+C Gateway(WiFi)



Smart Switch

70E855TY

1 Gang Smart Switch Module
(20A)



70E838TY

1 Gang Smart Switch Module
(200W/gang)



70E839TY

2 Gang Smart Switch Module
(200W/gang)



70E840TY

3 Gang Smart Switch Module
(200W/gang)



70E841TY

4 Gang Smart Switch Module
(200W/gang)



Smart Easy Switch (No neutral)

70E850TY

1 Gang Smart Easy Switch Module
(3W, 200W/Gang)



70E851TY

2 Gang Smart Easy Switch Module
(3W, 200W/Gang)



70E852TY

3 Gang Smart Easy Switch Module
(3W, 200W/Gang)



681820TY

6 Gang Remote Control
Scene Switch*



*No load wires between switch and light

Smart Scene Switch

*No load wires between switch and light

70E842TY

1 Gang Smart Scene
Switch Module*



70E843TY

2 Gang Smart Scene
Switch Module*



70E844TY

3 Gang Smart Scene
Switch Module*



70E845TY


4 Gang Smart Scene
Switch Module*



COLOUR ▶



Dimensions of Applicable Box



The codes are not included frames.

Smart Curtain Switch

*4/5-Wire Strong Current Motor

70E854TY

4 Gang Multifunction Smart Switch
Module(2 scene+2 switch)
(200W/gang)

70E846TY

1 Gang Smart Curtain
Switch Module*

70E847TY

2 Gang Smart Curtain
Switch Module*

Smart Tunable white and Dimming Set(with Smart Zigbee control light)

*No load wires between switch and light

70E853TY

Smart Tunable White and Dimming
Switch Module*

N62E0-1157

Smart LED KC1 Tunable WH Module
Max12W15°2700-6000K

N62E0-1158

Smart LED KC1 Tunable WH Module
Max12W24°2700-6000K

N62E0-1159

Smart LED KC1 Tunable WH Module
Max12W36°2700-6000K

N62E0-1160

Smart LED KC1 Tunable WH Module
Max12W60°2700-6000K

N6524-0391

SC1 constant current Tunable WH
+ Dim driver (5W100mA36VDC)

N6524-0392

SC1 constant current Tunable WH
+ Dim driver (7W160mA36VDC)

N6524-0393

SC1 constant current Tunable WH
+ Dim driver (9W200mA36VDC)

N6524-0394

SC1 constant current Tunable WH
+ Dim driver (12W300mA36VDC)

N6524-0412

Zigbee module for SC1 driver
(Tunable WH + Dim)

N6524-0437

SV1 constant voltage
tunable WH+dim driver(150W)

N68E0-0050

Smart LED Strip SS22 24V
60L-60L 10mm 12W TW IP20 5M

COLOUR ▶



Dimensions of Applicable Box



The codes are not included frames.

N68E0-0051

Smart LED Strip SS22 24V
60L-60L 10mm 12W TW IP44 5M

N6824-0180

Smart LED Strip SS52 B 24V
2835-96*2 12W
Tunable WH IP20 5M Ra90

N6824-0181

Smart LED Strip SS52 B 24V
2835-96*2 12W
Tunable WH IP65 5M Ra90

N0124-0651

Smart LED Ceiling light Dim&Tunable 26W WIFI

N0124-0652

Smart LED Ceiling light Dim&Tunable 36W WIFI



Smart Dimming Switch

*TRIAC

70E848TY

1 Gang Smart Dimming
Switch Module(200W/Gang)*

70E849TY

2 Gang Smart Dimming
Switch Module(200W/Gang)*

Smart 0/1-10V dimming set(with any 0/1-10V light)

*No load wires between switch and light

70E856TY

1 Gang Smart Dimming
Switch(0-10V)*

70E857TY

2 Gang Smart Dimming
Switch(0-10V)*

N65E0-0017

Zigbee to 0-10V converter
with on/off relay (800W/converter)

N65E0-0018

Zigbee module for SC1 driver
(dimming 0/1-10V)

Smart Thermostat

*VRF need customized AC gateway module

70E7024TY

Smart Central-AC Thermostat
Module(FCU)

70E7028TY


Smart Ventilation System Module




70E7031TY

Smart AC Thermostat Module*
(VRF,Modbus open protocol)

COLOUR ▶



Dimensions of Applicable Box



Frames 76

700610


1 gang frame

**700620**2 gang frame
(86mm*162mm)**700630**3 gang frame
(86mm*238mm)**700640**4 gang frame
(86mm*314mm)**700650**5 gang frame
(86mm*390mm)


Mounting Box

60710-501 Gang Flush Mounting Box
(use for 76 type)

COLOUR ▶



Dimensions of Applicable Box



Frames 86

7008202 Gang frame
(86mm*172mm)**700830**3 Gang Frame
(86mm*258mm)**700840**4 Gang Frame
(86mm*344mm)**700850**5 Gang Frame
(86mm*430mm)

Mounting Box


45DH861 Gang Flush Mounting Box
(use for standard 86 type)

Simon|E6

ENDLESS FREEDOM. INGENIOUS. STEADY



White



Champagne



Grey



Black

COLOUR ▶

White -46 Champagne -61 Grey -26 Black



Dimensions of Applicable Box

Plate: 60*60mm
Box: 72*72mm
Fixing Center: 60.2mm

Plate: 80*140mm
Box: 72*132mm
Fixing Center: 120.6mm

Smart Gateway

S00E0-S008

Smart Zigbee Gateway (LAN)



S00E0-S009

Smart Zigbee Gateway (WiFi)



72E8061TY

Smart ZigBee Wall-mounted USB
A-C Gateway(WiFi)



Smart Easy Switch (No neutral)


72E8031TY

1 Gang Smart Easy Switch
(3W, 200W/Gang)



72E8032TY

2 Gang Smart Easy Switch
(3W, 200W/Gang)



72E8033TY

3 Gang Smart Easy Switch
(3W, 200W/Gang)



681820TY

6 Gang Remote Control
Scene Switch*



*No load wires between switch and light

Frames

720620

2 Gang Frame/86type
(86mm*175mm)



720630

3 Gang Frame/86type
(86mm*260mm)



720640

4 Gang Frame/86type
(86mm*345mm)




720650

5 Gang Frame/86type
(86mm*430mm)



Simon|E3

ESSENTIAL DESIGN MAXIMUM FUNCTIONALITY

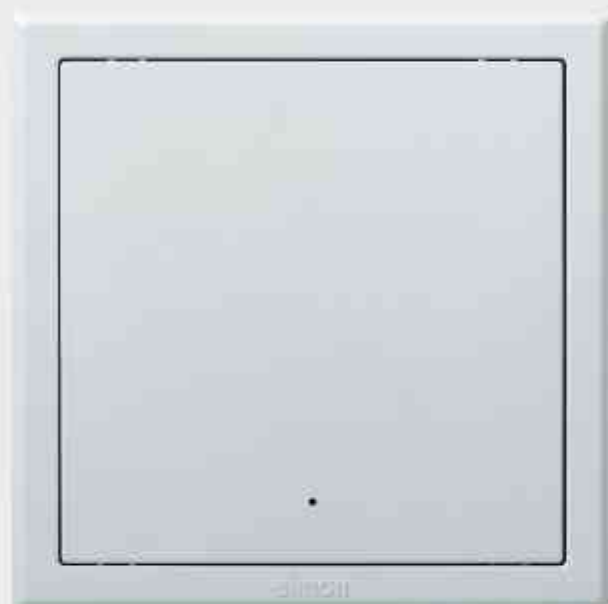

White



Silver



Black

COLOUR ▶

White

-57
Silver

-26
Black



Dimensions of Applicable Box

Plate: 60*60mm
Box: 72*72mm
Fixing Center: 60.5mm

Plate: 60*140mm
Box: 72*132mm
Fixing Center: 120.5mm

Smart ZigBee Gateway

S00E0-S008

Smart Zigbee Gateway (LAN)



S00E0-S009

Smart Zigbee Gateway (WiFi)



30E8061TY

Smart ZigBee Wall-mounted USB
A-C Gateway(WiFi)



Smart Switch

30E801TY

1 Gang Smart Switch
(200W/Gang)



30E802TY

2 Gang Smart Switch
(200W/Gang)



30E803TY

3 Gang Smart Switch
(200W/Gang)



30E804TY

4 Gang Smart Switch
(200W/Gang)



Smart Easy Switch (No neutral)

30E831TY

1 Gang Smart Easy Switch
(3W, 200W/Gang)



30E832TY

2 Gang Smart Easy Switch
(3W, 200W/Gang)



30E833TY

3 Gang Smart Easy Switch
(3W, 200W/Gang)



681820TY

6 Gang Remote Control
Scene Switch*



*No load wires between switch and light

Smart Scene Switch

*No load wires between switch and light

30E805TY

1 Gang Smart Scene Switch*



30E806TY

2 Gang Smart Scene Switch*



30E807TY

3 Gang Smart Scene Switch*



30E808TY

4 Gang Smart Scene Switch*



COLOUR ▶

White

-57
Silver-26
Black

Dimensions of Applicable Box


 Plate: 80*80mm
 Box: 72*72mm
 Fixing Center: 60.8mm

 Plate: 80*140mm
 Box: 72*132mm
 Fixing Center: 120.6mm

Smart Curtain Switch

*4/5-Wire Strong Current Motor

30E813TY

1 Gang Smart Curtain Switch*



30E814TY

2 Gang Smart Curtain Switch*



Smart Dimming Switch

*TRIAC

30E815TY

1 Gang Smart Dimming Switch*
(200W/Gang)

30E816TY

2 Gang Smart Dimming Switch*
(200W/Gang)

Smart Thermostat

30E706TY

Smart Central-AC Thermostat(PCU)



30E710TY

Smart Ventilation System



30E711TY

Smart Central-AC Thermostat
(*VRF, Modbus open protocol)*

*VRF need customized AC gateway module

Frames

*Frame only needed when multi-gang installation is required. Order separately.

300610

1 Gang Frame/86type
(88mm*88mm)

300620


2 Gang Frame/86type
(88mm*174mm)

300630

3 Gang Frame/86type
(88mm*260mm)

Simon|M3

Boundless Fearless

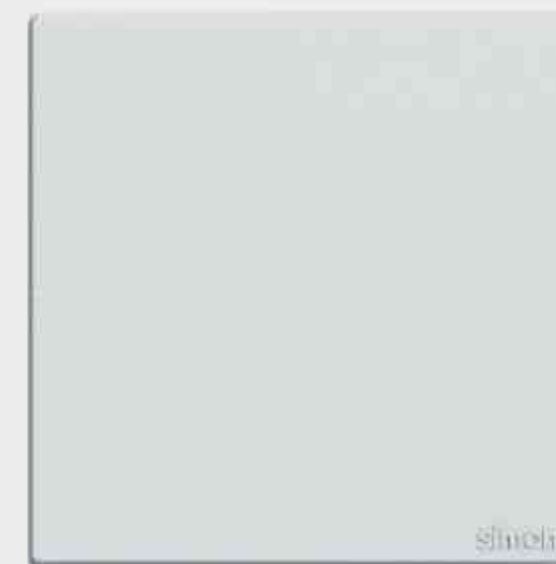


White



Champagne



Grey



Black

Smart Gateway

500E0-S008

Smart Zigbee Gateway
(LAN)



500E0-S009

Smart Zigbee Gateway
(WiFi)



58E8061TY

Smart ZigBee Wall-mounted
USB A+C Gateway(WiFi)



Smart Switch

58E8001TY

1 Gang Smart Switch
(200W/gang)



58E8002TY

2 Gang Smart Switch
(200W/gang)



58E8003TY

3 Gang Smart Switch
(200W/gang)



58E8004TY

4 Gang Smart Switch
(200W/gang)



Smart Scene Switch

*No load wires between switch and light

58E8005TY

1 Gang Smart Scene
Switch*



58E8006TY

2 Gang Smart Scene
Switch*



58E8007TY

3 Gang Smart Scene
Switch*



58E8008TY

4 Gang Smart Scene
Switch*



58E8021TY

6 Gang Smart Scene
Switch*



Smart Curtain Switch

*4/5-Wire Strong Current Motor

58E8013TY

1 Gang Smart Curtain Switch*



58E8014TY

2 Gang Smart Curtain Switch*



Smart Dimming Switch

*TRIAC

58E8015TY

1 Gang Smart Dimming Switch*
(>4W, 200W/Gang)



58E8016TY

2 Gang Smart Dimming Switch*
(>4W, 200W/Gang)



Smart Easy Switch (No neutral)

58E8031TY

1 Gang Smart Easy Switch
(■3W, 200W/Gang)



58E8032TY

2 Gang Smart Easy Switch
(■3W, 200W/Gang)



58E8033TY

3 Gang Smart Easy Switch
(■3W, 200W/Gang)



681820TY

6 Gang Remote Control
Scene Switch*



*No load wires between switch and light

Smart Tunable white and Dimming Set (with Smart Zigbee control light)

*No load wires between switch and light

58E8017TY

Smart Tunable White
and Dimming Switch*



N62E0-1157

Smart LED KC1 Tunable WH Module
Max12W15°2700-6000K



N62E0-1158


Smart LED KC1 Tunable WH Module
Max12W24°2700-6000K



N62E0-1159

Smart LED KC1 Tunable WH Module
Max12W36°2700-6000K





N62E0-1160

Smart LED KC1 Tunable WH Module
Max12W60°2700-6000K



N6524-0391

SC1 constant current Tunable WH
+ Dim driver (5W100mA36VDC)



N6524-0392

SC1 constant current Tunable WH
+ Dim driver (7W160mA36VDC)



N6524-0393

SC1 constant current Tunable WH
+ Dim driver (9W200mA36VDC)



N6524-0394

SC1 constant current Tunable WH
+ Dim driver (12W300mA36VDC)



N6524-0412

Zigbee module for SC1 driver
(Tunable WH + Dim)



N6524-0437

SV1 constant voltage
tunable WH+dim driver(150W)



N68E0-0050

Smart LED Strip SS22 24V
60L+60L 10mm 12W TW IP20 5M



N68E0-0051

Smart LED Strip SS22 24V
60L+60L 10mm 12W TW IP44 5M



N6824-0180

Smart LED Strip SS52 B 24V
2835-96*2 12W
Tunable WH IP20 5M Ra90



N6824-0181

Smart LED Strip SS52 B 24V
2835-96*2 12W
Tunable WH IP65 5M Ra90



N0124-0651

Smart LED Ceiling light Dim&Tunable 26W WIFI

N0124-0652

Smart LED Ceiling light Dim&Tunable 36W WIFI



Smart Thermostat

*VRF, need customized AC gateway module

58E7101TY

Smart Central-AC Thermostat
(FCU)




58E7105TY

Smart Ventilation System



58E7106TY

Smart AC Thermostat
(*VRF, Modbus open protocol)*



Frames

580620

2 Gang Frame (86mm x 172mm)



580630

3 Gang Frame (86mm x 258mm)



580640

4 Gang Frame (86mm x 344mm)




580650

5 Gang Frame (86mm x 430mm)



Simon|52S

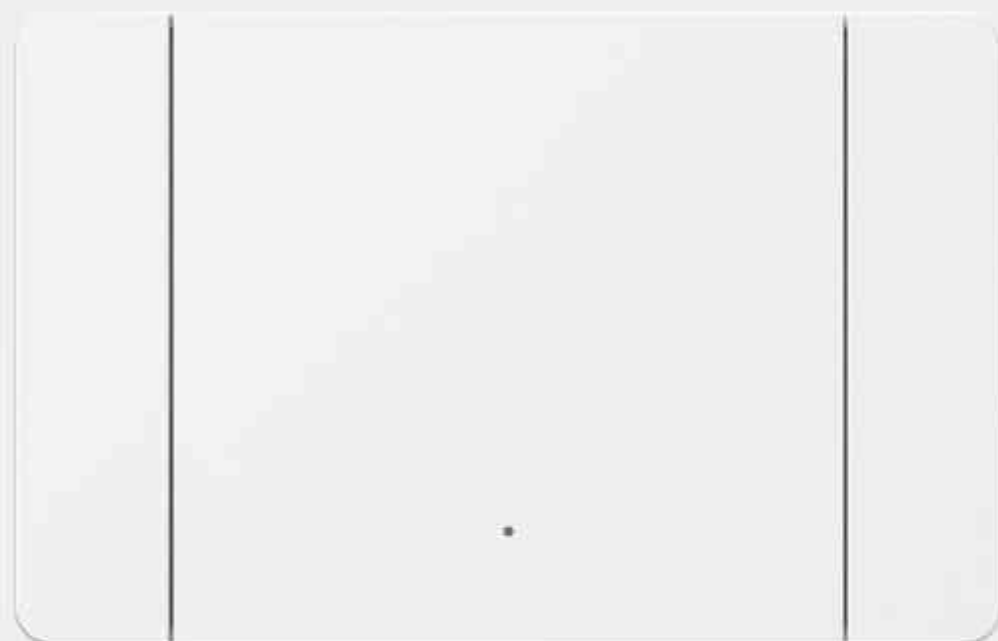

White



Gold



Grey



Black

COLOUR ▶

White

-7W
Gold

-7V
Grey

-26
Black

zigbee

Dimensions of Applicable Box

Plate: 86*148mm
Box: 72*132mm
Fring Center: 120.6mm

Smart Gateway

S00E0-S008

Smart Zigbee Gateway (LAN)



S00E0-S009

Smart Zigbee Gateway (WiFi)



72E8061TY

Smart ZigBee Wall-mounted USB
A+C Gateway(WiFi)



Smart Easy Switch (no neutral)

HNE8031TY

1 Gang Smart Easy Switch
(no neutral)



HNE8032TY

2 Gang Smart Easy Switch
(no neutral)



HNE8033TY

3 Gang Smart Easy Switch
(no neutral)



*No load wires between switch and light

681832TY

2 Gang Remote Control
Scene Switch*



681820TY

6 Gang Remote Control
Scene Switch*



Smart socket



Smart adapter(Wi-Fi)

Smart electricity utilization and energy saving, by Wi-Fi



- Plug and play, remote control any time you need it

- Multiple control modes
Support APP control, voice control, timing, scenes and automation with other smart devices

- Wide range of socket and plug types

Code	Product Description
S00E0-S001	Simon Smart adapter BS std
S00E0-S002	Simon Smart adapter US std
S00E0-S003	Simon Smart adapter Schuko std
S00E0-S004	Simon Smart adapter AU std
S00E0-S018	Simon Smart adapter BS std
S00E0-S019	Simon Smart adapter US std



Product Spec:

Power supply: 100-240VAC 50/60Hz
Installation: plug and play
Communication: Wi-Fi

Smart breaker(Wi-Fi / ZigBee)

Convert traditional sockets into smart ones



- Easy to retrofit
Install in original wall box, also compatible with Euro-standard wall box

- Multiple control ways
Support wall control, APP control, voice control, timing, scenes and automation with other smart devices

- Safe and reliable
AC zero-crossing detection design provide MAX electrical safety and protection of devices

- Support group control

Code	Product Description
S00E0-S020	Smart Breaker(Wi-Fi)
S00E0-S021	Smart Breaker(ZigBee)



Smart breaker (Wi-Fi/ZigBee)

Product Spec:

Power supply: 100-240VAC 50/60Hz
Load: Max 16A
Installation: install in socket wall box, compatible with Euro-standard wall box
Communication: Wi-Fi/ZigBee

Smart security



Smart door lock/LK33/LK20 (Wi-Fi)

- Different unlock methods

Fingerprint, password, card, key, App (remote unlock by temporary password)

- Doorbell function

With one doorbell button on surface of the lock

- Low power reminder, Pickproof alarm

App reminder and lock alarm

- Grouping and act with other devices

Can act with other devices, satisfy different scene customization requirements

Product Spec:

Power supply: 4 AA dry battery &

Emergency power supply

Communication: Wi-Fi


Code	Product Description
------	---------------------

SC0E0-LK33	LK33 Simon smart lock
------------	-----------------------

SC0E0-LK20	LK20 Simon smart lock
------------	-----------------------



Smart security

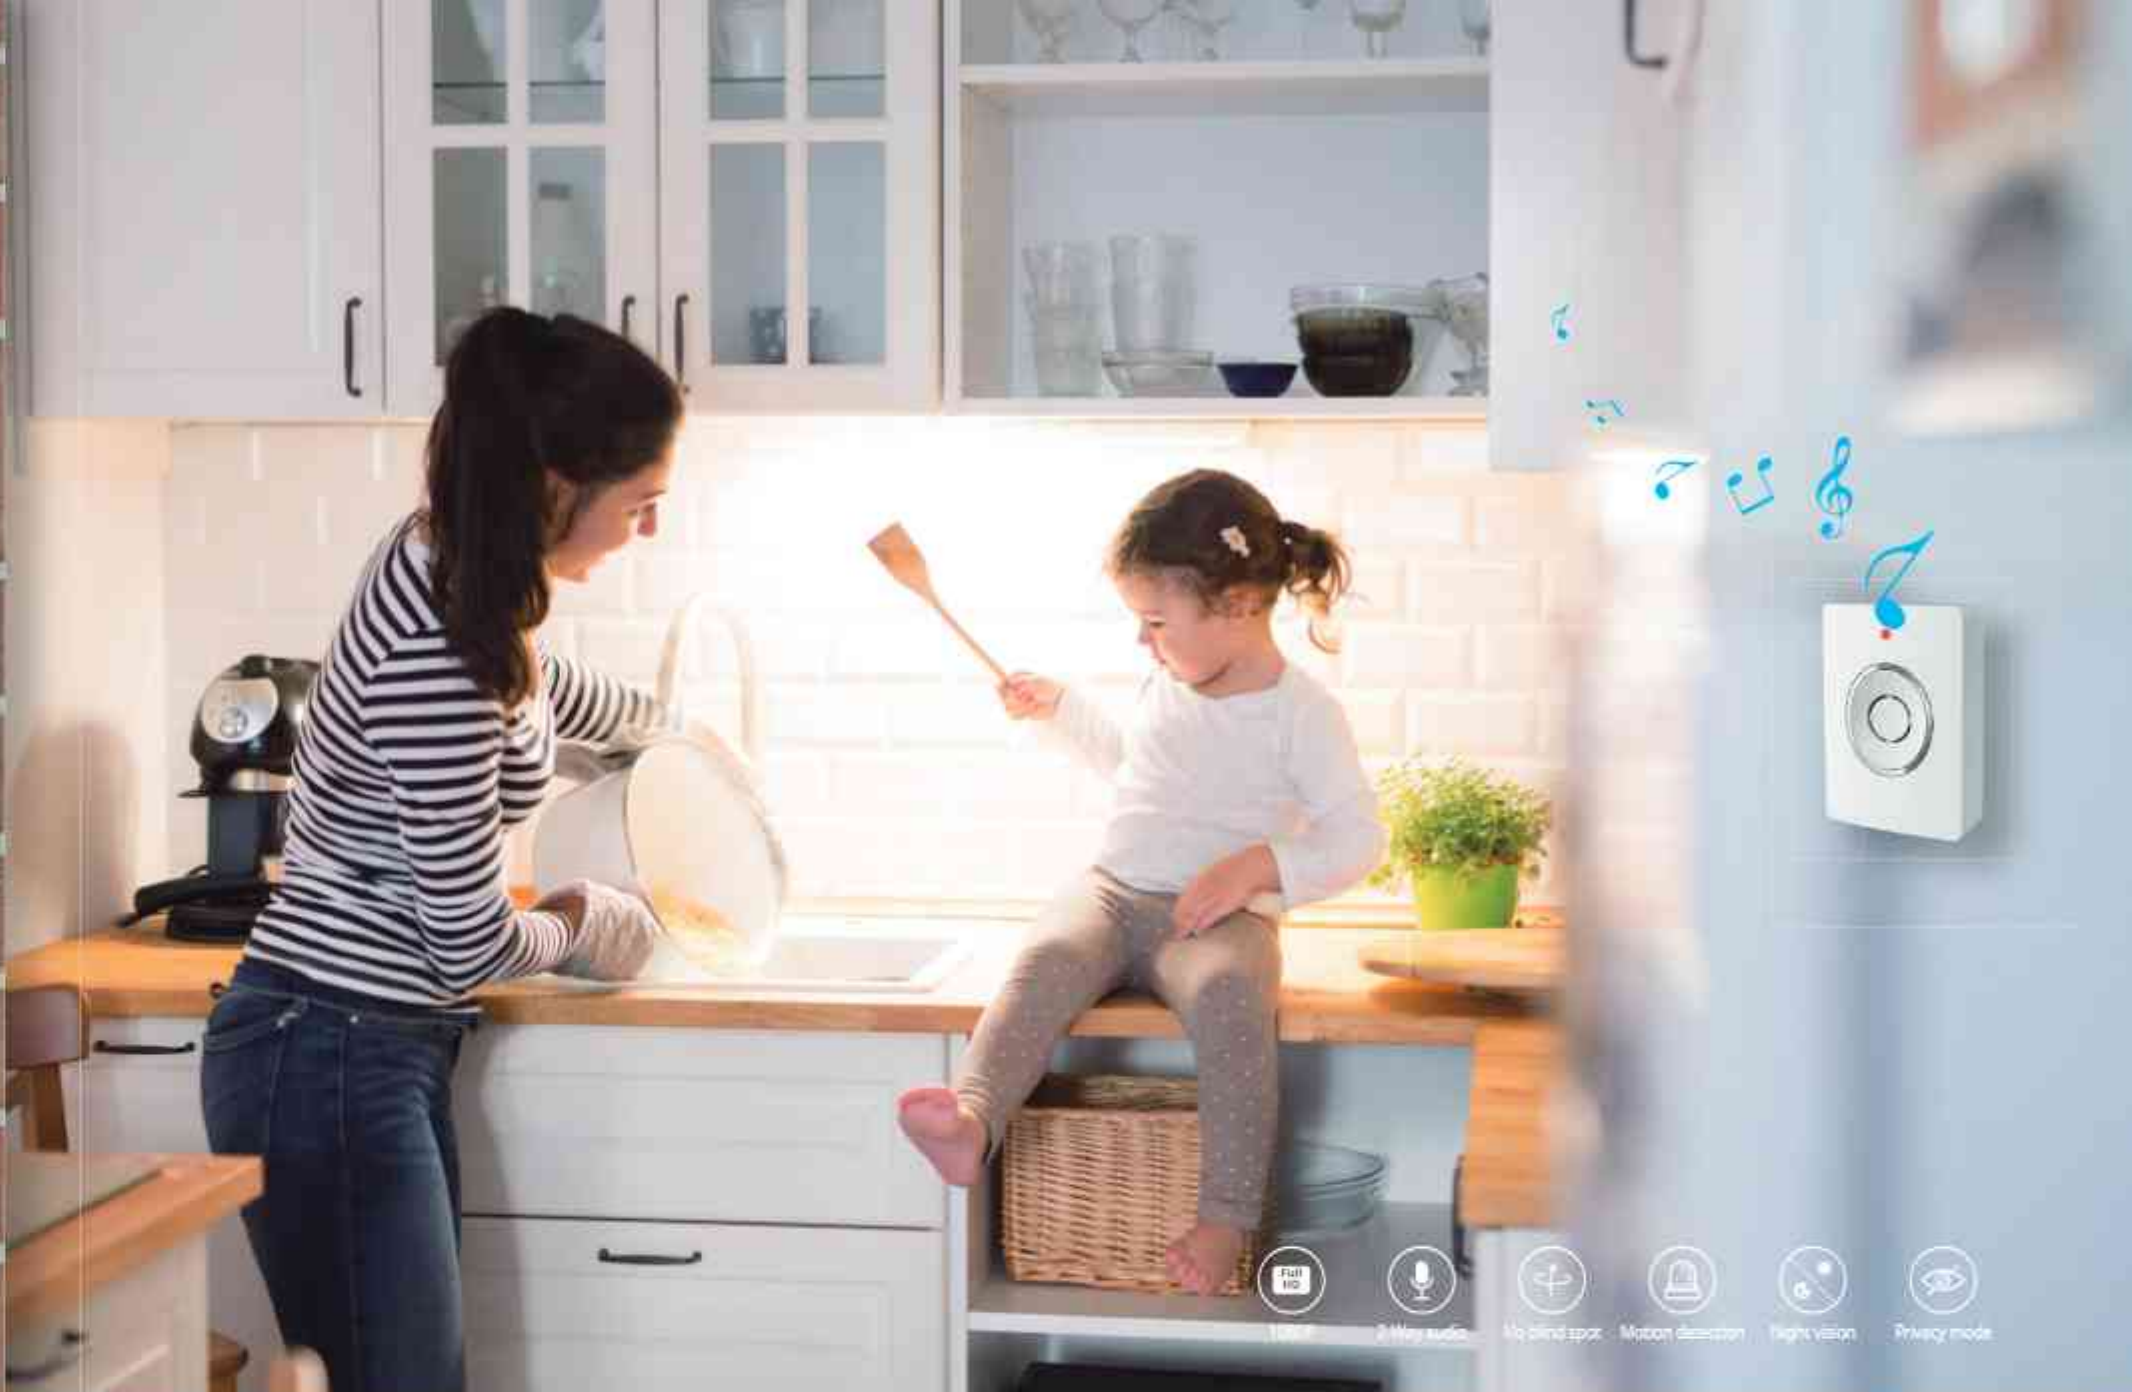

Indoor
Ding-Dong unit

Outdoor
doorbell

Smart doorbell(Wi-Fi)

- Remote view the real-time 1080P video through APP
No matter where you are, you can view the high quality video to monitor the situation
- Support night vision
- Multi-ways to activate the alert
When the visitor presses the doorbell/PIR detected, the indoor Ding-Dong unit will give an alert tone
- 2-way audio
Crystal clear two-way audio, listen in and talk back to the visitor in real time
- Wide-angle view outside the door and waterproof design



Smart Wi-Fi doorbell set



S00E0-S024

Product Spec:

Power supply: outdoor doorbell: 18650 rechargeable lithium battery
/ indoor receiver: LR6/AA*3(not included)
Local storage: support max 128G Micro-SD card
Video resolution: 2 million pixels
Intercom volume(30cm): 80dB
Alarm volume(30cm): 80dB
Communication: Wi-Fi
RF433 distance: approx 80m(Open area)

Smart security



Smart video doorphone(Wi-Fi)



Outdoor doorbell



Indoor unit

- Unlock function, can connect 2 locks, meet the needs of the villa application
Support connect 2 locks(not included)to the indoor unit. When the visitor press the call button, the host can unlock on the indoor unit.
- View the real-time 1080P video through the indoor video unit or APP
No matter where you are, you can view the high quality video to monitor the situation
- Support night vision
- Video doorphone - our home guard
When the visitor presses the doorbell, the indoor unit will give an alert tone
- 2-way audio
Crystal clear two-way audio, listen in and talk back to the visitor in real time
- Wide-angle view outside the door and waterproof design



Smart Wi-Fi doorbell set



S00E0-S028

Product Spec:


Power supply: 4-wire connection between indoor & outdoor units

Video resolution: 2 million pixels

Intercom volume(30cm):80dB

Communication: Wi-Fi

Smart security

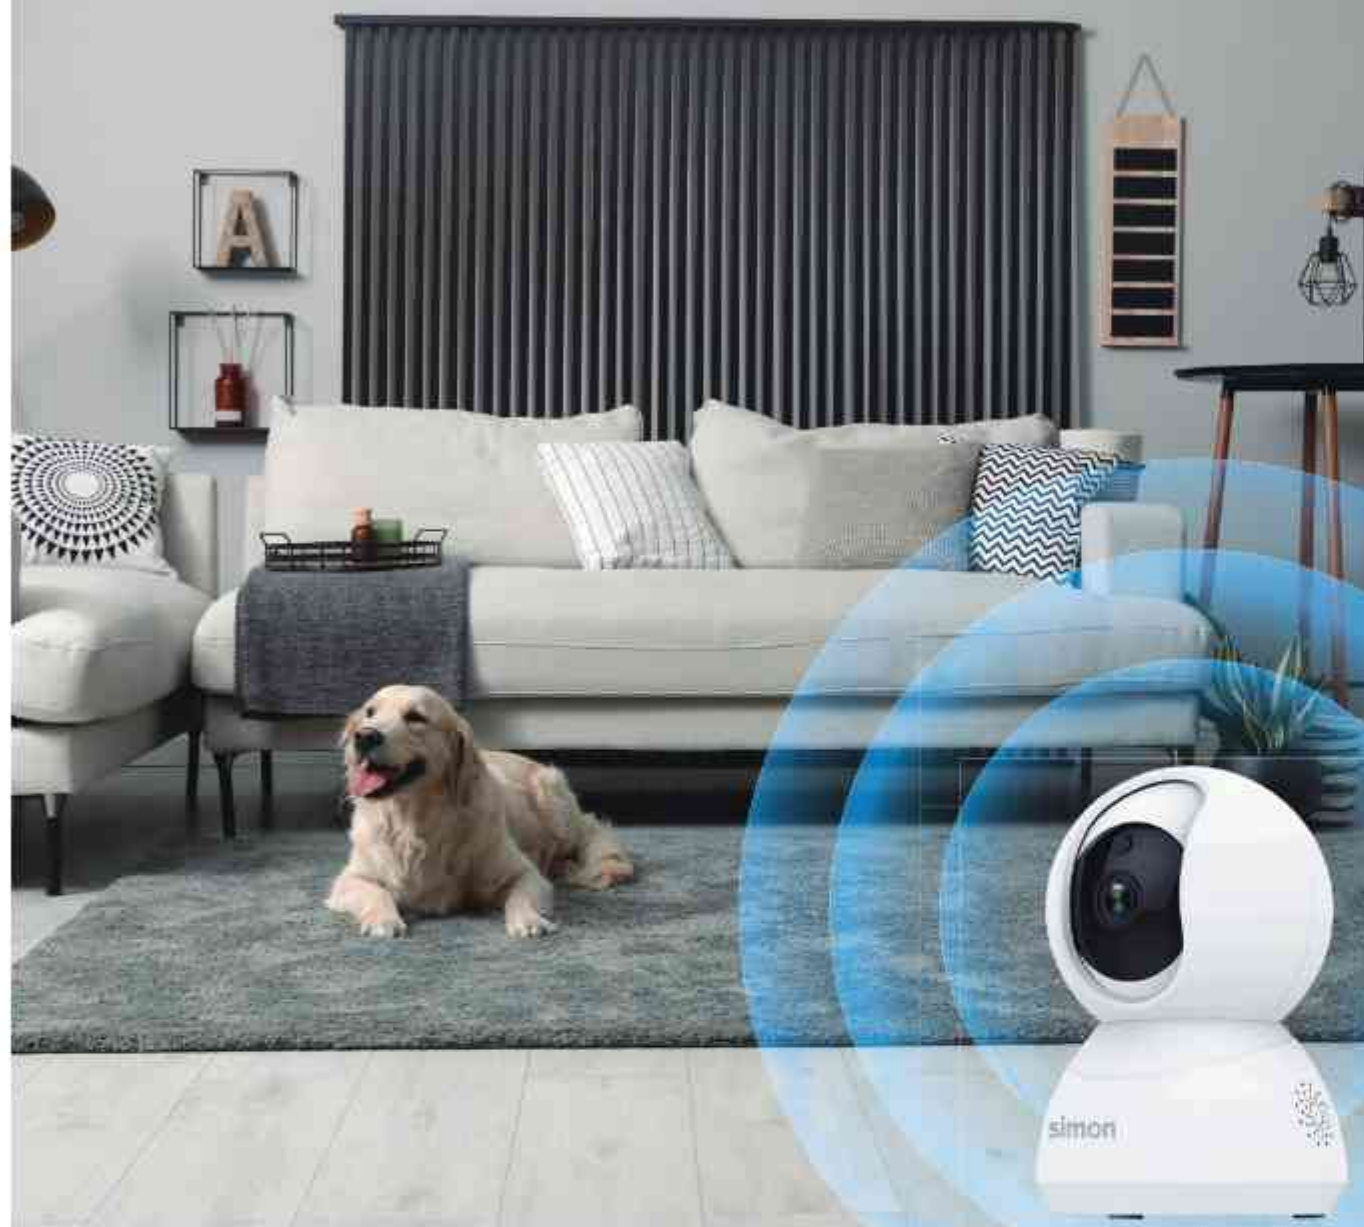

Smart security



Smart camera 20/30(Wi-Fi)



- High quality video, full HD 1080P
2 million pixels, 1/2.7-inch CMOS sensor, Full HD 1080P
- No blind spot
360° full view/Pan 355°/Tilt 110°, rotate the camera to view every corner of your home
- Support night vision
8-10m effective distance under night vision situation
- Motion tracking
Motion detection and smart tracking alarm push
- 2-way audio
Crystal clear two-way audio, listen in and talk back to your family in real time

Product Spec:

Power supply: USB 5V/1A
Local storage: support Micro SD card(max 128G)
Video resolution: 2 million pixels
Communication: Wi-Fi

Code	Product Description
S0060-S006	Smart camera 30(EU plug)
S0060-S022	Smart camera 30(US plug)
S0060-S007	Smart camera 20



Smart security



Smart flammable gas detector(ZigBee)

Plug and play, smart alarm, reduces safety hazards for gas use



- Quick response with a loud alarm within 2 seconds
A buzzer alarm is accompanied by a flashing LED indicator light

- Real-time monitor from APP
App alerts when detect flammable gas

- Ultra-low power consumption saves power
An average power consumption of less than 1.5W saves power



S2200-0901

Product Spec:

Communication: ZigBee
Power input: 110-240V~ 50/60Hz
Alarm sound pressure: 75dB(1 meter)
Alarm concentration: 6% LEL(methane)

Smart security



Smart smoke alarm detector(ZigBee)

Fire detector, high-sensitivity, high-decibel smoke alarm



- Quick response with a loud alarm within 2 seconds
A buzzer alarm is accompanied by a flashing LED indicator light

- Flame retardant housing, self-check function
Self check gives easier access to device status

- Ultra-low power consumption saves power
An average power consumption of less than 1.5W saves power



S2200-0902

Product Spec:

Communication: ZigBee
Battery type: 3V CR123A/CR17335

Smart security



- Paste for usage
- Real-time monitor
- App remote alarm
- Dustproof & waterproof

Smart flood detector(ZigBee)

Timely report water leakage at home in case of water flooding



- Paste to use
Fast and easy to install, paste the detector anywhere

- Real-time monitor from App
App alerts when detect water leakage

- IP67 professional dustproof and waterproof
Professional protection level of device



S2200-0903

Product Spec:

Communication: ZigBee
Battery type: 2 x AAA battery

Smart security



- Ultra-low power consumption
- Real-time monitor
- App remote alarm

Smart Emergency Button(ZigBee)

Timely report SOS signal to your mobile phone



- Easy to carry around
Small in size and light in weight

- Ultra-low power consumption, low power reminder
At least 12 months lifetime of battery in normal situation

- Real-time notification
One-click emergency push notification



S00E0-S013

Product Spec:

Communication: ZigBee
Battery type: 3V CR123A/CR17335

Smart security



Smart alarm security set(Wi-Fi)

The Wi-Fi main unit acts as a smart alarm and wireless receiver from sensors

When receiving the signal from the sensors, it will ring and a push notification will be sent to your mobile phone.

Open the APP to check if someone presses the doorbell or the sensor is triggered

Full range of different function sensors as a home guard, send the signal to the main unit by RF433

Window/door sensor

Vibration sensor

Indoor motion sensor

Smart doorbell(Wi-Fi)

Remote key

SOS button

Flood detector



Product Spec:

Main unit communication: Wi-Fi

Between sensors and the main unit: RF433



Smart curtain motor



Smart curtain motor(Wi-Fi/ZigBee)

No need extra wiring, control the curtain anytime in any room



Smart curtain motor

- Silent design
Noise is less than 30dB
- Multiple control ways
Support APP control, voice control, wall controller, remote switch/control panel
- Obstruction detection
Stop automatically when detecting obstruction
- Manual trigger to auto on/ off
- Automatically act with other devices
Support customization for automatically action



Product Spec:

Power supply: 100-240V 50/60Hz	RF: 433Hz
Rated torque: 1.2N.m	Max current: 2A
RPM: 100r/min	Max power: 24W
IP Grade: IP20	Max Load: 50kg
Running speed: 14cm/s	Weight: 1.2kg
	Communication: Wi-Fi/ZigBee

Code Product Description

3006D-S025	Smart curtain motor(ZigBee)
3006D-S023	Smart curtain motor(Wi-Fi)

**can work with standardized B2 curtain track like Sunfly, Sheng-Glass or any other brands with B2 gear line*

Smart automation



Smart automation



Smart motion sensor(ZigBee)

Detect motion and guard your home
Automatically act with other devices via gateway



· Detection with no blind spots
Detection up to 7 meters and 170°

· Real-time reminder from APP
App alert when detects motion

· Automatically act with other devices
Support customization for automatically action



S00E0-S010

Product Spec:

Communication: ZigBee
Battery type3V CR2450
Rotation angle: horizontal 360°, vertical 90°
Detection distance: 7m
Detection angle: 170°

Smart door and window magnetic sensor(ZigBee)

Monitor and record the door and window status in your home at any time
Automatically act with other devices via gateway



· Real-time monitoring, alarm for forced damage
Real-time monitoring for door and window status, and alarm when lock is damaged by external force

· Ultra-low power consumption, battery replace warning
When battery power lower than 4.5V, lock will prompt "battery use up, please replace it"

· Automatically act with other devices
Support customization for automatically action



S00E0-S012

Product Spec:

Communication: ZigBee
Battery type3V CR2032



Smart temperature and humidity Sensor(ZigBee)

High accuracy detection, automatically act with other devices via gateway



- High accuracy detection, real-time status display

Collect data every 5 minutes, upload data when temperature change 0.5°C, humidity change 5%

- Ultra-low power consumption, low power reminder

At least 8 months lifetime of battery in normal situation

- Data record displayed in App

Update every 1 hour, history record for 6 months



S00E0-S011

Product Spec:

Communication: ZigBee

Battery type: 3V CR2032

Temperature detection range and accuracy: -20°C~+60°C ±0.3°C

humidity detection range and accuracy: 0~100% RH ±3%

Smart Vibration Sensor(ZigBee)

High accuracy detection, automatically act with other devices via gateway



- High accuracy detection, real-time status display

Detect the vibration/movement/shake/drop

- Ultra-low power consumption, low power reminder

At least 8 months lifetime of battery in normal situation

- Data record displayed in App

Update every 1 hour, history record for 6 months



S00E0-S014

Product Spec:

Communication: ZigBee

Battery type: 3V CR2032

Temperature detection range and accuracy: -20°C~+60°C ±0.3°C

humidity detection range and accuracy: 0~100% RH ±3%

Smart automation



Smart automation



Smart human presence detector ceiling sensor(ZigBee)

Detect human presence and auto act with other devices



- Detect human presence with no blind spots
Ceiling installation, 360° view of detection
Detect moving human body, human static and human micro motion

- Real-time reminder from APP
App alert when detects motion

- Smart automation with lighting by illuminance monitor
Detect light environment to adjust sensor sensitivity

- Automatically act with other devices
Support customization for automatically action



Product Spec:

Power supply: 220V~50/60Hz
Cut out size: φ60~65mm
Product size: φ76xH51mm
Communication: ZigBee
Detection method: Microwave radar
Installation: Ceiling/surface mounted
Installation height: 2.5-3M
Detection distance: 7M
Light intensity measurement range: 0~1200 Lux

Smart RF infrared remote controller(Wi-Fi)

One for all, can control IR/RF devices



- 6000+ IR code and support RF devices, fast match
Compatible with mainstream brands of TV, air-conditioner, smart curtain motor, electric door.

- Multiple control ways
Support wall control, APP control, voice control, timing, scenes and automation with other smart devices

- USB power supply
No need extra battery

- DIY mode to control non-brand device
Remote controller can learn IR signal of other devices by DIY mode to control all devices

Code	Product Description
SCQE0-S016	Smart Infrared Remote Controller
SCQE0-S017	Smart RF Infrared Remote Controller



Product Spec:

Communication: Wi-Fi
Power input: DC 5V/1A (Micro USB)
IR distance: 8m



Smart KC1 spotlight (ZigBee)

- Tunable white from 2700K to 6000K
- Dimming brightness
- Voice control: Works with Alexa & Google speaker. Siri
- Wall switch control: Works with Simon Smart Tunable white & Dimming Switch
- Excellent LED chip
- LED COB chip, CRI>90, Ra>90
- Anti-glare, UGR16, shield angle 10°/30°
- Exact lighting distribution/ Lens + reflector optical design:
- TIR anti-ocular lens
- Various beam angle, minimum to 15°
- Various frame, satisfy different application
- Can match with about 30 kinds of frames, including round, square, grid, and colorful options
- Constant current driver with anti-over-voltage and short circuit protection



APP control





Voice control




Coordinated control

Warm-Cool

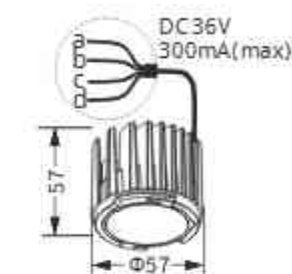

a	Brown	Connect driver output-1	-	Connected warm light
b	Blue			
c	Red	Connect driver output-2	-	Connected cold light
d	Black			



Dimming Brightness



Smart LED KC1
Tunable WH Module




1. SC1 constant current dim+tunable WH driver
2. Dim+tunable White Zigbee module

Product Spec:

Voltage: DC 30-36V
Power: Max12W
PF: 0.9
CRI: 90
Beam angle: 15°/24°/36°/60°
Lumen output(lm):
Max700/750/760/840lm
IP20
Material: Die Casting Aluminum
Product size: Ø57mm × 57mm
Finish: Black
Lifetime: 30000h

Smart Spotlight KC1 Tunable White(ZigBee)

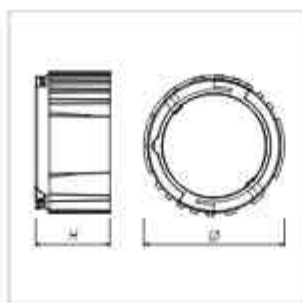

Order Code	Product Description	Nominal Power	Voltage	Beam Angle	Luminous Flux@6500K	Product Size (axH mm)	Pcs/Carton	Carton Size (LxWxH mm)
N62E0-1157	Smart LED KC1 Tunable WH Module Max12W15°2700-6000K	12	DC 30-36V	15°	Max 700lm	ø57*57	24	360x210x160
N62E0-1158	Smart LED KC1 Tunable WH Module Max12W24°2700-6000K	12	DC 30-36V	24°	Max 750lm	ø57*57	24	360x210x160
N62E0-1159	Smart LED KC1 Tunable WH Module Max12W36°2700-6000K	12	DC 30-36V	36°	Max 760lm	ø57*57	24	360x210x160
N62E0-1160	Smart LED KC1 Tunable WH Module Max12W60°2700-6000K	12	DC 30-36V	60°	Max 840lm	ø57*57	24	360x210x160
N6524-0391	SC1 constant current dim+tunable WH driver (5W100mA36VDC)	5	220-240V~	-	-	158x48x26	24	360x210x160
N6524-0392	SC1 constant current dim+tunable WH driver (7W160mA36VDC)	7	220-240V~	-	-	158x48x26	24	360x210x160
N6524-0393	SC1 constant current dim+tunable WH driver (9W200mA36VDC)	9	220-240V~	-	-	158x48x26	24	360x210x160
N6524-0394	SC1 constant current dim+tunable WH driver (12W300mA36VDC)	12	220-240V~	-	-	158x48x26	24	360x210x160
N6524-0412	Dim+tunable WH zigbee module	-	-	-	-	41x37x18	120	360x210x160



Order Code	Product Description
706853TY	Smart Tunable white & Dimming Switch Module
700610	1 Gang frame



Order Code	Product Description	Finishing	Cutout Size (mm)	Product Size (axH mm)	Pcs/Carton	Carton Size (LxWxH mm)
N0424-1651	Duro KC1 IP44 frame	White	ø75	ø82*38.5	48	390x345x210
N0424-0231	Duro KC1 ivory 10° anti-glare frame	Ivory	ø75	ø85*23	48	390x285x210
N0424-0232	Duro KC1 ivory 30° anti-glare frame	Ivory	ø75	ø85*30	48	390x285x210
N0424-0233	Duro KC1 black 10° anti-glare frame	Black	ø75	ø85*23	48	390x285x210
N0424-0234	Duro KC1 black 30° anti-glare frame	Black	ø75	ø85*30	48	390x285x210
N0424-0271	Duro KC1 round frame	White	ø75	ø85*32	48	390x285x210
N0424-0272	Duro KC1 oval frame	White	ø75	ø85*32	48	390x285x210



Order Code	Product Description	Finishing	Cutout Size (mm)	Product Size (LxWxH mm)	Pcs/Carton	Carton Size (LxWxH mm)
N0424-0273	Duro KC1 ivory 10° anti-glare square frame	Ivory	ø75	85*85*23	48	390x345x210
N0424-0274	Duro KC1 ivory 30° anti-glare square frame	Ivory	ø75	85*85*30	48	390x345x210
N0424-0275	Duro KC1 black 10° anti-glare square frame	Black	ø75	85*85*23	48	390x345x210
N0424-0276	Duro KC1 black 30° anti-glare square frame	Black	ø75	85*85*30	48	390x345x210
N0424-0277	Duro KC1 round embedded frame	White	ø90	ø90*35	48	495x395x240
N0424-0278	Duro KC1 square embedded frame	White	90*90	86*86*35	48	495x395x240




Order Code	Product Description	Finishing	Cutout Size (mm)	Product Size (LxWxH mm)	Pcs/Carton	Carton Size (LxWxH mm)
N0424-0279	Duro KC1 single flat grid frame	White	ø85	97.5*97.5*30	48	390x375x240
N0424-0280	Duro KC1 double flat grid frame	White	85*190	97.5*205*30	24	445x375x200
N0424-0281	Duro KC1 triple flat grid frame	White	85*300	97.5*312.5*30	12	575x340x200
N0424-0282	Duro KC1 single anti-glare grid frame	White	100*100	115*115*45	48	510x420x270
N0424-0283	Duro KC1 double anti-glare grid frame	White	100*220	115*237*45	24	515x420x260
N0424-0284	Duro KC1 triple anti-glare grid frame	White	100*330	115*344*45	12	135x60x355



Order Code	Product Description	Finishing	Cutout Size (mm)	Product Size (axH mm)	Pcs/Carton	Carton Size (LxWxH mm)
N0424-0391	Duro KC1 White anti-glare plastic frame	White	ø75	ø90*30	48	390x345x210
N0424-0392	Duro KC1 black anti-glare plastic frame	Black	ø75	ø90*30	48	390x345x210
N0424-0393	Duro KC1 silver anti-glare plastic frame	Silver	ø75	ø90*30	48	390x345x210
N0424-0394	Duro KC1 champagne anti-glare plastic frame	Champagne	ø75	ø90*30	48	390x345x210
N0424-0395	Duro KC1 rose gold anti-glare plastic frame	Rose Gold	ø75	ø90*30	48	390x345x210
N0424-0430	Duro KC1 shining black anti-glare metal frame	Black	ø75	ø85*30	48	390x345x210
N0424-0431	Duro KC1 matt silver anti-glare metal frame	Silver	ø75	ø85*30	48	390x345x210
N0424-0433	Duro KC1 shining black anti-glare plastic frame	Black	ø75	ø85*30	48	390x345x210
N0424-0434	Duro KC1 matt silver anti-glare plastic frame	Silver	ø75	ø85*30	48	390x345x210
N0424-1655	Duro KC1 shining black frame	Black	ø75	ø85*40.5	48	410x375x320
N0424-1654	Duro KC1 shining silver frame	Silver	ø75	ø85*40.5	48	410x375x320

Smart Lighting

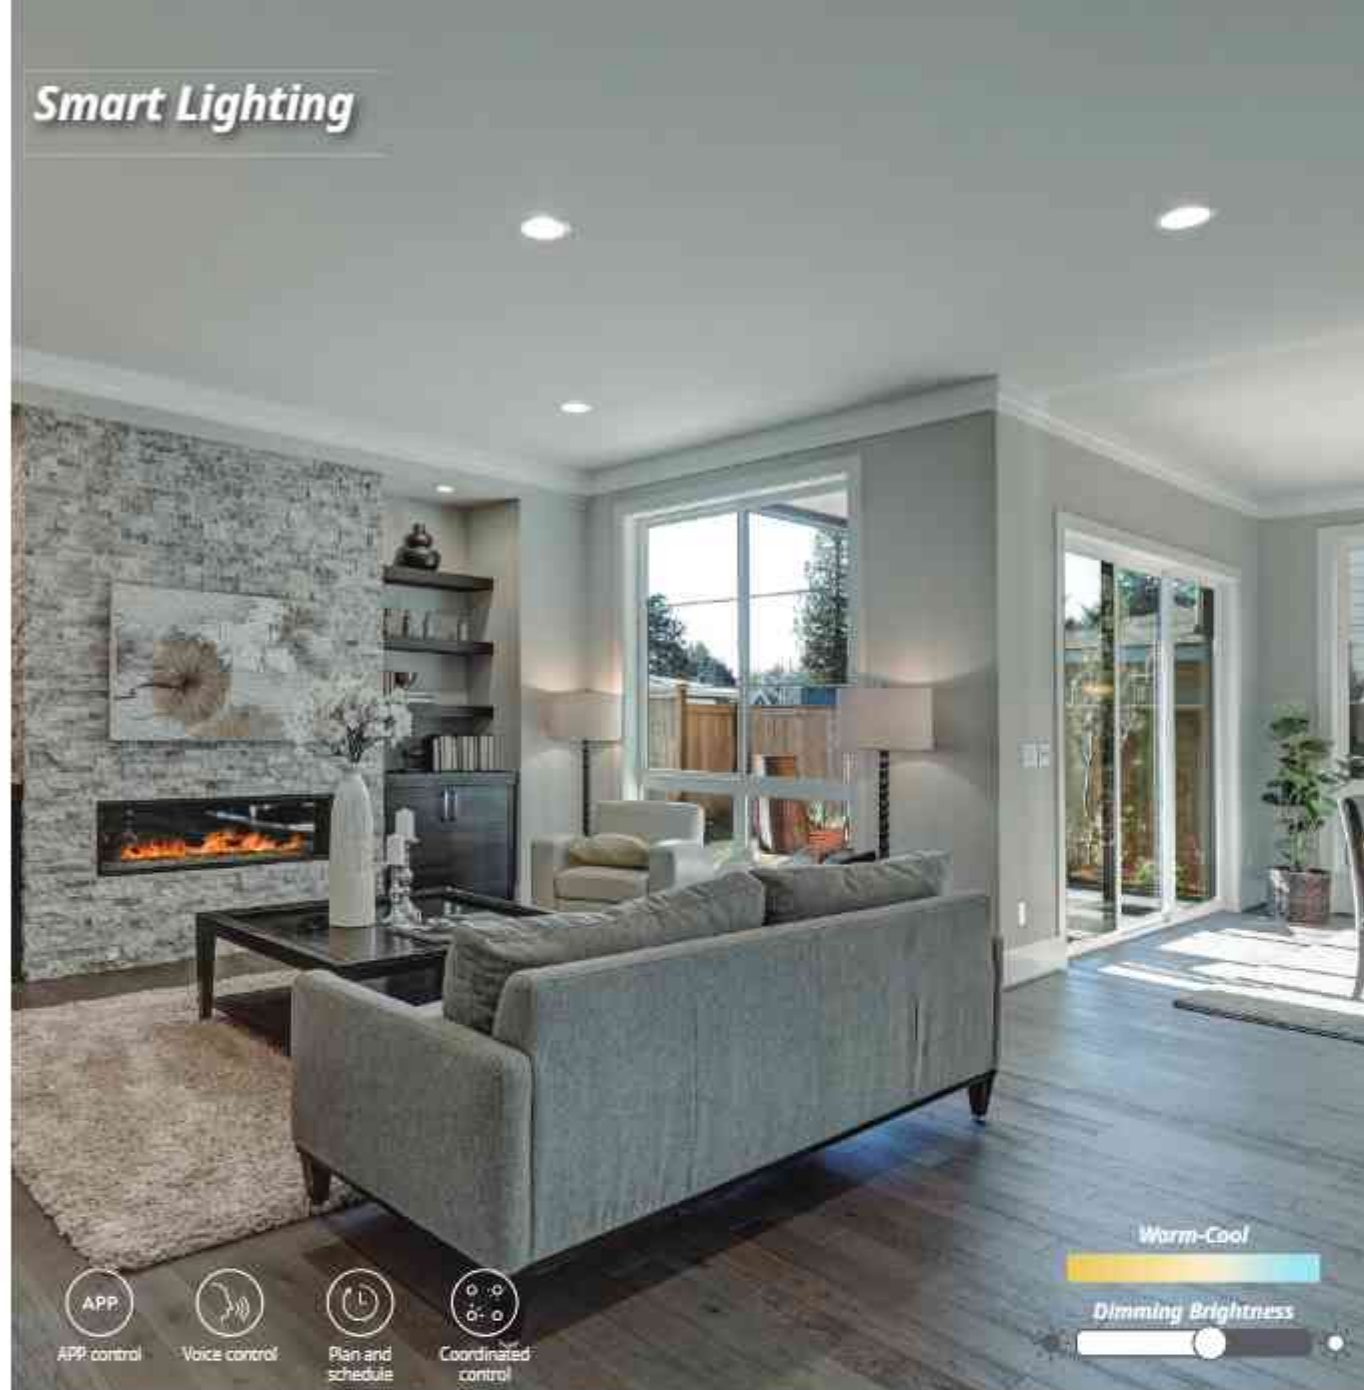

APP control



Voice control



Plan and schedule



Coordinated control

Warm-Cool

Dimming Brightness



Smart Lighting



APP control



Voice control



Privacy protection



Coordinated control

Warm-Cool

Dimming Brightness



Smart downlight (Wi-Fi)



Tunable white

Support color temperature tunable, from warm light to cold light

Dimming brightness

Support dimming from dark to bright

Plan and schedule

Can set timer or count-down function

Grouping and act with other devices via gateway

Can act with other devices, satisfy different scene customization requirement



Product Spec:

Power: 8W/17W/24W
Voltage: 220-240V
Lumen output: 600lm/1200lm/2000lm
PF: 0.5
CRI: 80
Beam angle: 100°
Cutout size: φ85-95/ φ145-155/ φ195-205

Smart strip (Wi-Fi)



RGB/ Tunable white/ Dimming, millions of color freely changed

Grouping and act with other devices via gateway

Can act with other devices, satisfy different scene customization requirement

Remote control by App:

Timer/custom scene/ customization/group control

Military-grade security to ensure safety of data transmission

Can set timer or count-down function




Color changes follow the rhythm of music

Support music mode


Product Spec:

Power: 9W/15W
Voltage: DC12V
Plug type: BS, EU
Lumen output: 600lm/m; 950lm/m
Length: 2/5M per roll

Smart Lighting

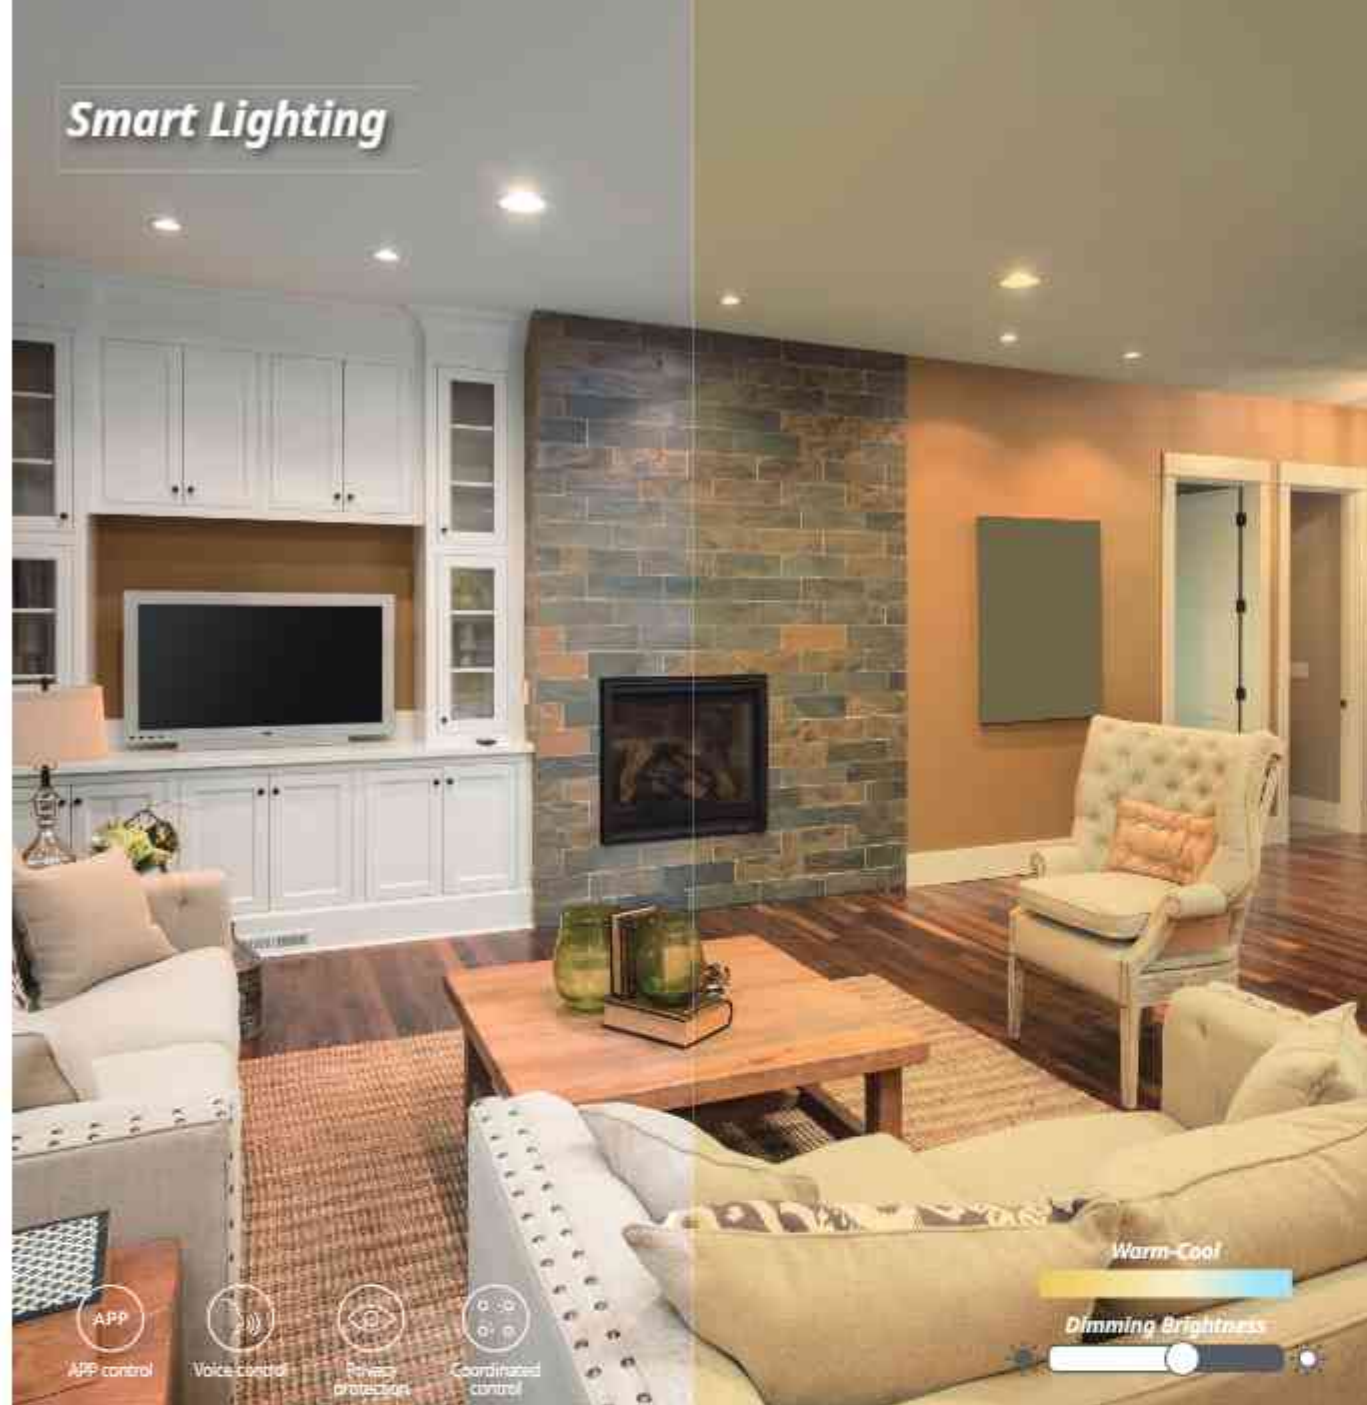

Smart Lighting

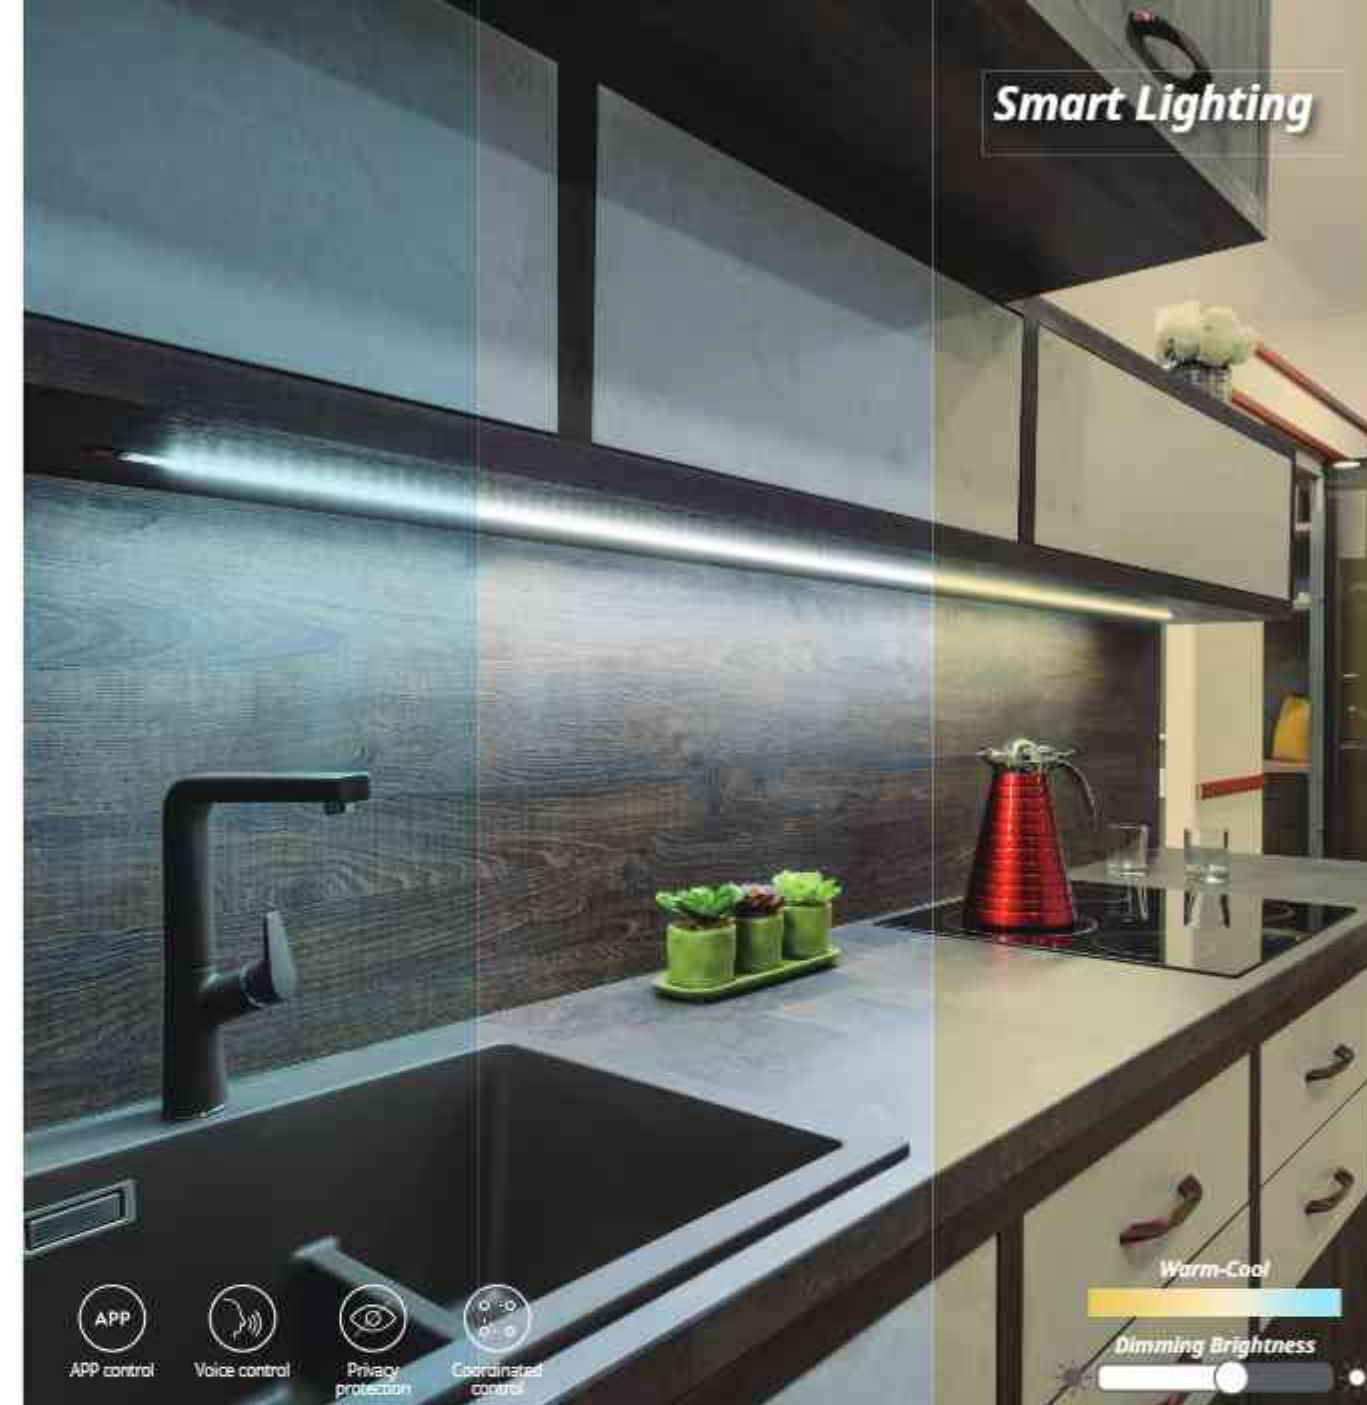

Smart Ceiling light (Wi-Fi)

- Tunable white/ Dimming , 3000K-5700K, 5%-100%

- Ultra slim design, perfectly integrated into the ceiling
Thinned to be 38.5mm

- Remote control by App:
Timer/custom scene/ automation/group control

- Integrated design, dust and insect prevention
IP40, easy to clean

- Grouping and act with other devices via gateway
Can act with other devices, satisfy different scene customization requirement

Product Spec:

Φ350×56mm / Φ450×56mm

Power: 28W/ 36W

Voltage: 220-240V

Lumen output: 2100lm/ 3000lm

PF: 0.9

CRI: 90

Installation: Easy & fast installation



Smart Strip-SS22/SS52 (ZigBee)

- Tunable white/ Dimming , bring warm or bright lighting atmosphere

- Grouping and act with other devices via gateway
Can act with other devices, satisfy different scene customization requirement

- Remote control by App or Simon Smart Tunable white & Dimming Switch
Timer/custom scene/ automation/group control

- Military-grade security to ensure safety of data transmission
Can set timer or count-down function

- Color changes follow the rhythm of the music
Support music mode



SS22/ SS52 Product Spec:

5m/Roll

Power: 12W

Voltage: DC24V

Lumen output: up to 1200lm

CRI: 80/90

IP20/IP44/IP65 option




N6524-0437	SVI constant voltage tunable white + dim driver (150W)
N6524-0412	ZigBee module for SC1 driver (Tunable WH + Dim)

Wall switch module & frame (optional):

70E853TY	Smart Tunable white & Dimming Switch Module
700610	1 Gang frame



Smart Lighting

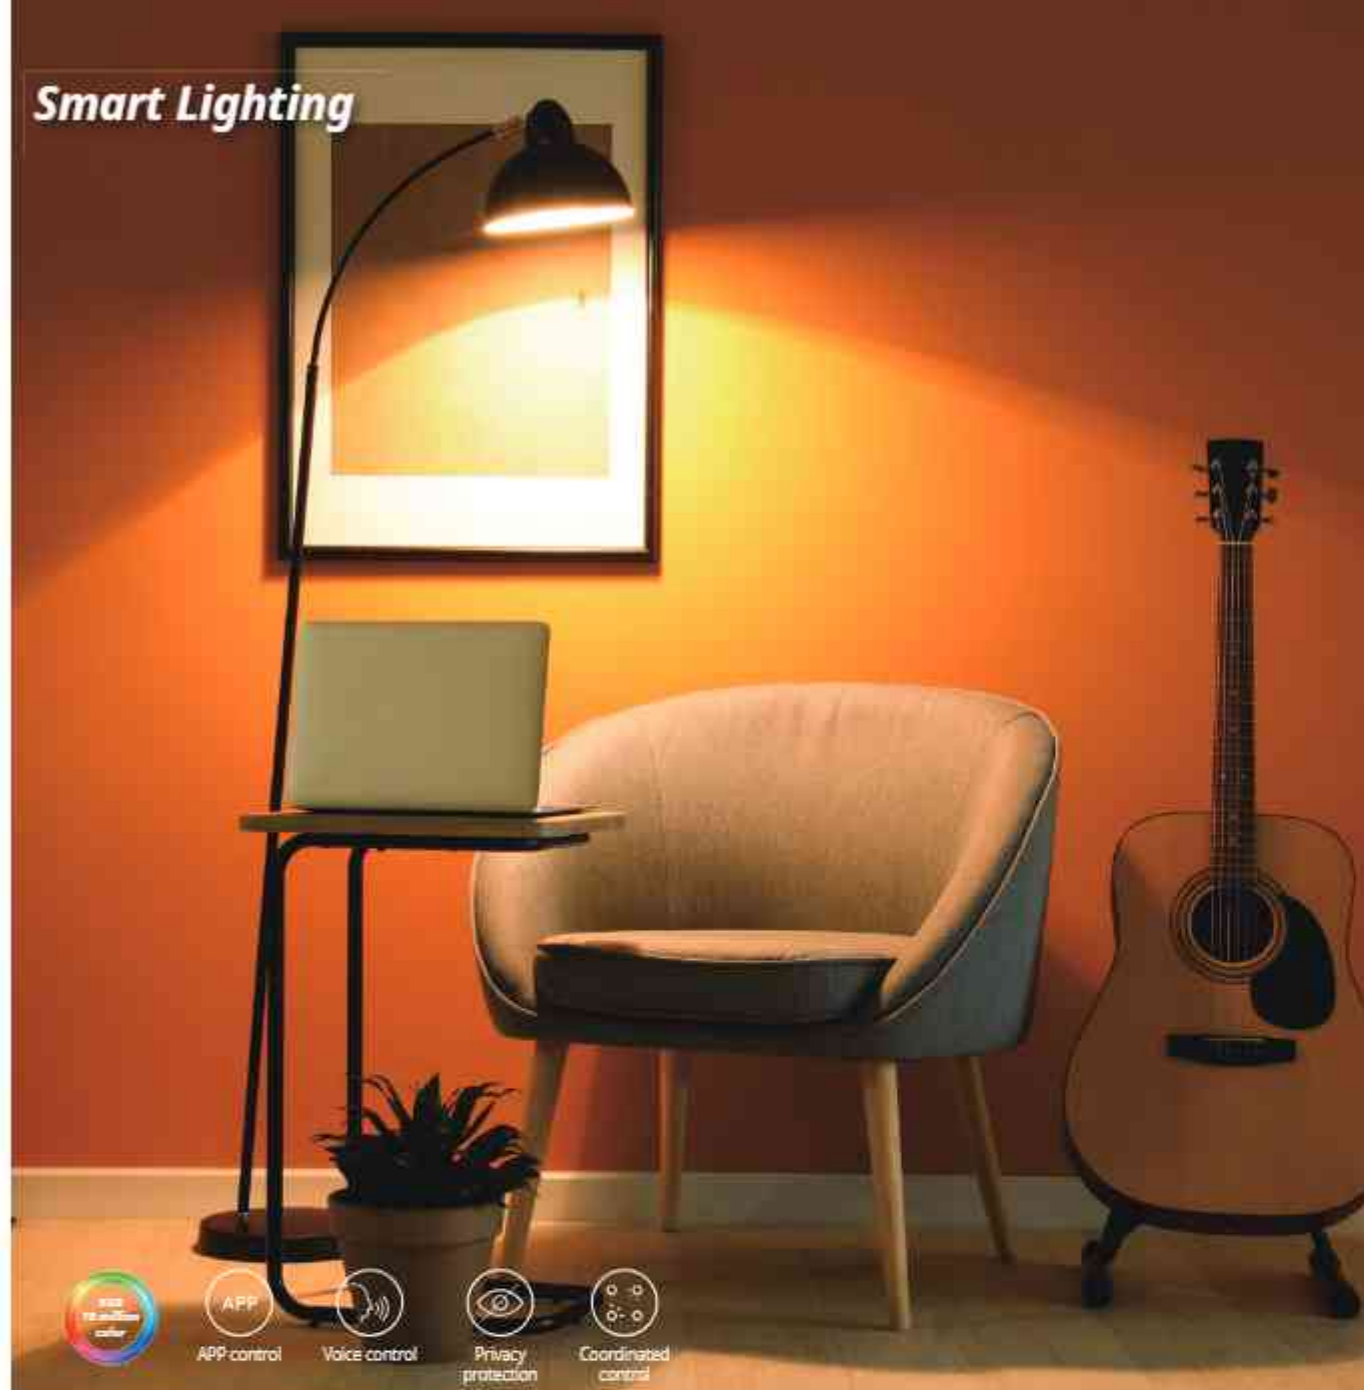

Smart Lighting



Warm-Cool

Dimming Brightness



Smart Bulb (Wi-Fi)



· RGB/ Tunable white/ Dimming , millions of color freely changed

· Remote control by App:
Timer/custom scene/ automation/group control

· Color changes follow the rhythm of music
Support music mode

· Grouping and act with other devices via gateway
Can act with other devices, satisfy different scene customization requirement

· Military-grade security to ensure safety of data transmission
Can set timer or count-down function



Product Spec:

Power: 8.5W
Voltage: 220-240V
Lumen output: 806lm
PF: 0.5
Beam angle: 180°
Installation: E27

Smart GU10 (Wi-Fi)



· RGB/ Tunable white/ Dimming , millions of color freely changed

· Remote control by App:
Timer/custom scene/ automation/group control

· Color changes follow the rhythm of music
Support music mode

· Grouping and act with other devices via gateway
Can act with other devices, satisfy different scene customization requirement

· Military-grade security to ensure safety of data transmission
Can set timer or count-down function



Product Spec:

Power: 5W
Voltage: 220-240V
Lumen output: 350lm
PF: 0.5
Beam Angle: 100°

Smart downlight(Wi-Fi)



Order Code	Product Description	Nominal Power	Luminous Flux@6500K	Cutout size (mm)	Product Size (mm)	Pcs/Carton	Carton Size
N0360-1142	Smart LED downlight Dim&Tunable 8W WIFI	8	600 lm	Φ85-Φ95	Φ105×35	30	373×252×230
N0360-1143	Smart LED downlight Dim&Tunable 17W WIFI	17	1200 lm	Φ145-Φ155	Φ165×38	30	515×345×245
N0360-1144	Smart LED downlight Dim&Tunable 24W WIFI	24	2000 lm	Φ195-Φ205	Φ215×38	30	677×478×225

Smart Strip(Wi-Fi)



Order Code	Product Description	Nominal Power	Color Temperature	Luminous Flux@6000K	Product Size (/72 pcs Leds per meter)	Length per Roll	Pcs/Carton	Carton Size
N6880-0060	Smart LED Strip RGB+Tunable WH 9W 3000-6000K EU 2M WIFI	9W	RGB+CCT	540lm	12mm width	2m	30	450×350×305
N6880-0061	Smart LED Strip RGB+Tunable WH 15W 3000-6000K EU 5M WIFI	15W	RGB+CCT	950lm	12mm width	5m	20	360×360×370
N6880-0062	Smart LED Strip RGB+Tunable WH 9W 3000-6000K BS 2M WIFI	9W	RGB+CCT	540lm	12mm width	2m	30	450×350×305
N6880-0063	Smart LED Strip RGB+Tunable WH 15W 3000-6000K BS 5M WIFI	15W	RGB+CCT	950lm	12mm width	5m	20	360×360×370

Smart lamp(Wi-Fi)



Order Code	Product Description	Nominal Power	Color Temperature	Luminous Flux@6500K	Beam Angle	Product Size (mm)	Pcs/Carton	Carton Size
N6260-1153	Smart RGB + Tunable CCT bulb 8.5W WIFI	8.5	RGB 16 million colors in full range	808lm	180°	60×109	100	660×323×242
N6260-1170	Smart LED GU10 Tunable WH 5W 2700-6500K WIFI	5	2700K-6500K	350lm	100°	50×58	100	570×280×150
N6260-1171	Smart LED GU10 RGB+Tunable WH 5W WIFI	5	RGB+Tunable WH	350lm	100°	50×58	100	570×280×150



— **simon** —
LIGHT UP
EMOTIONS

The logo for Simon Light Up Emotions. It features the word "simon" in a bold, lowercase sans-serif font, flanked by two horizontal lines. Below this, the words "LIGHT UP" and "EMOTIONS" are stacked in a smaller, uppercase sans-serif font. A thin, curved line sweeps across the bottom of the text.